


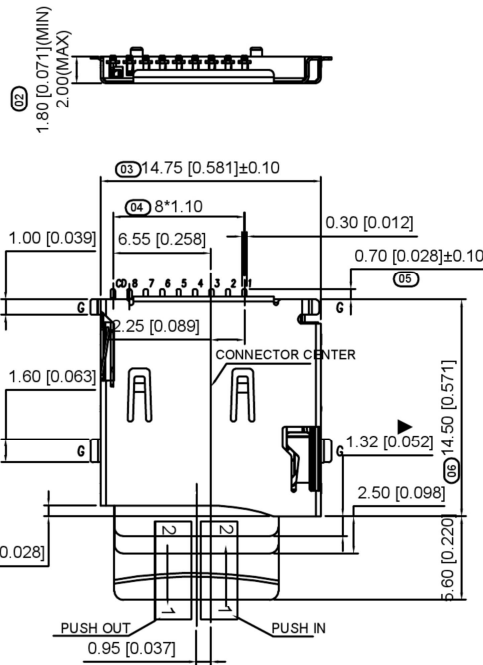



PIN NO.	NAME	TYPE	DESCRIPTION
1	DATE	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

Specification:

- Electrical Characteristics:
Contact Current Rating:0.5 Amperes.
Dielectric Withstanding Voltage:AC500V r.m.s.
Insulation Resistance:1000 MΩ Minimum.
Contact Resistance:40 mΩ Maximum.
- Environmental:
Operating Temperature:-25°C~+90°C.
- Environmental:
Mating Cycles:5,000 Insertions.
- Mechanical Characteristics:
Card Push Insertion/Out Force:0.2~1.40kgf.
Contact Separation Force:0.20kgf Minimum.
- Material:
Insulator:HI-Temp Plastic UL 94V-O Rated.
Contact:Copper Alloy(t=0.15mm).
Shell:Stainless Steel(t=0.15mm).
Spring:SWP.
- ⑥ Make is FAI test Dimension
▼ Make is major test Dimension

TF-015-X

G=GOLD 1u"
N=NICKEL 80u"

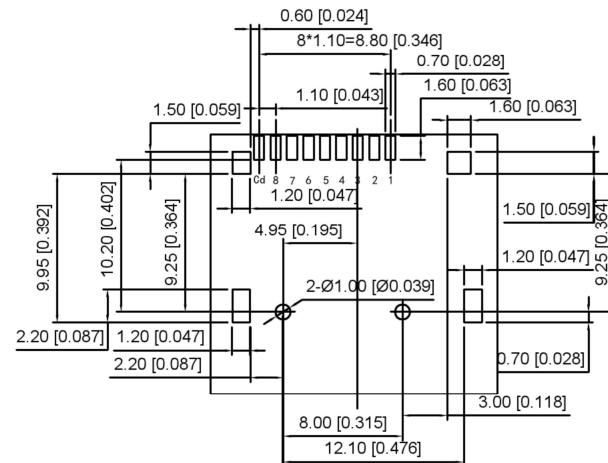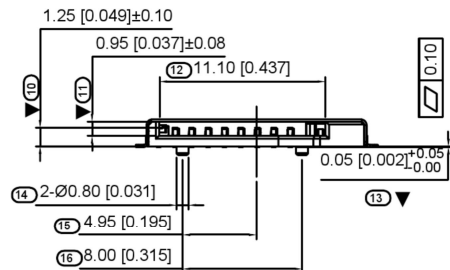

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING
④	Spring	1	SWP	
③	Shell	1	SUS	
②	Terminal	9	COPPER ALLOY	
①	Housing	1	HI-TEMP.PLASIC UL 94V-O	BLACK

				ANGLAR	±5°		DSND		SCALE: N/A	MODEL TYPE: TF CARD CONN		
				L ≤ 4	±0.2		DWN		VIEW: 	PART NO.: XKTF-1150-1		
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16 < L ≤ 63	±0.4		APPD		SIZE: A4			
				L > 63	±0.5							
REVISIONS				UNSPECIFIED TOLERANCES		DONG GUAN XI BANG ELECTRONIC CO., LTD				WEIGHT	SHEET	REVISION
www.alpsr.com www.gdxjdz.com www.xbswitch.com											1/1	A0