

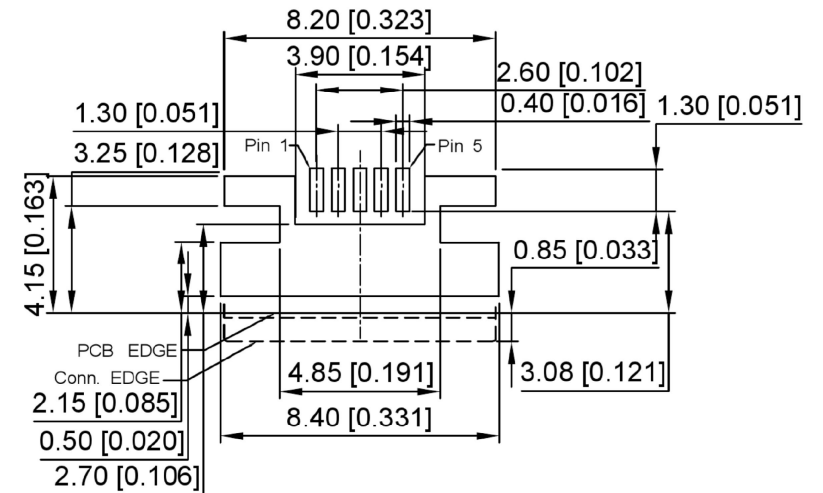

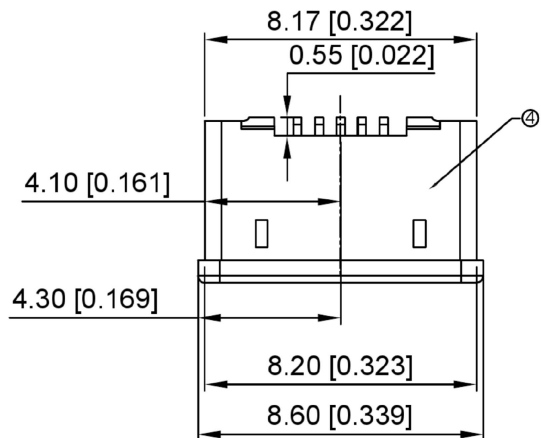
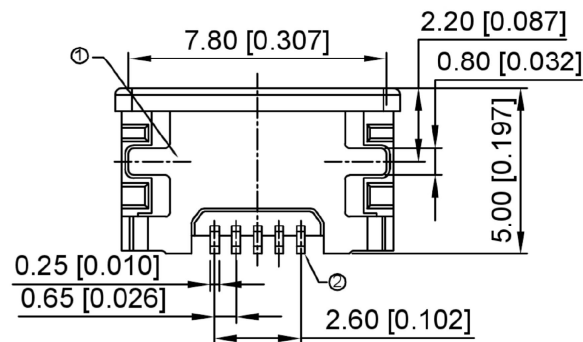
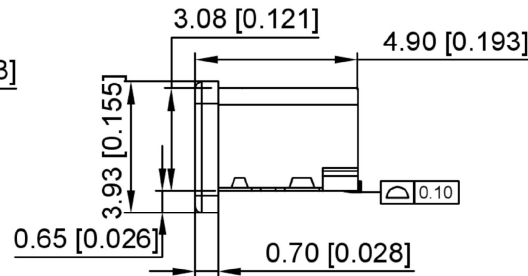


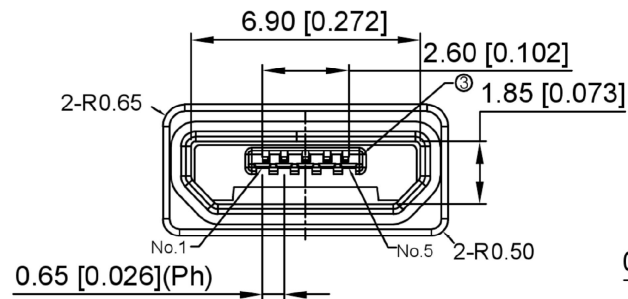

Recommended PCB Layout
(General Tolerance: ± 0.05)

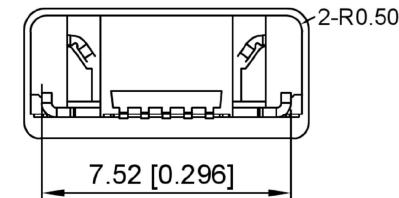

ITEM	PART NAME	QTY	MATERIAL	FINISHING
③	Shell	1	Stainless Steel	
②	Terminal	5	Copper Alloy	
①	Housing	1	HI-TEMP. PLASIC UL 94V-0	BLACK

- 1.Contact Resistance:30mOHM Max.;
- 2.Dielectric Withstanding Voltage:100V AC For 1 Minute;
- 3.Insulation Resistance:1000M OHM Min.;
- 4.Mating And Unmating Force:
Mating Force:35N Max/Unmating Force:8N Min;
- 5.Durability:10000 Cycles;

				ANGLAR	±5°
				L≤ 4	±0.2
				4<L≤ 16	±0.3
				16<L≤ 63	±0.4
				L> 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
	DATE	REVISED	APPROVED		
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND	SCALE: N/A	MODEL TYPE:	MICRO USB		
DWN	VIEW:	PART NO.:			
CHKD	UNIT: mm/in	DWG NO.:	U-E-M5SS-Y-5		
APPD	SIZE: A4	WEIGHT	SHEET	REVISION	
			1/1	A0	