




LEFT SIDE VIEW

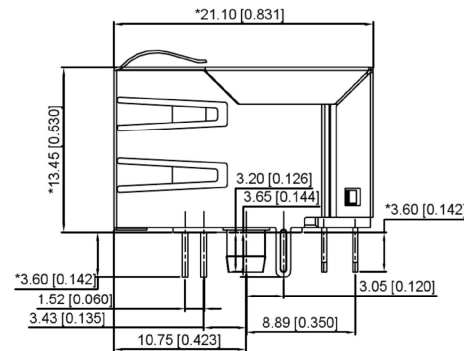


RIGHT SIDE VIEW




TOP VIEW




BACK VIEW

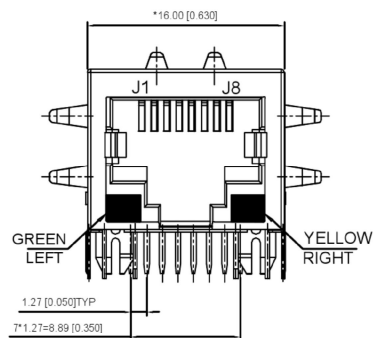

FRONT VIEW

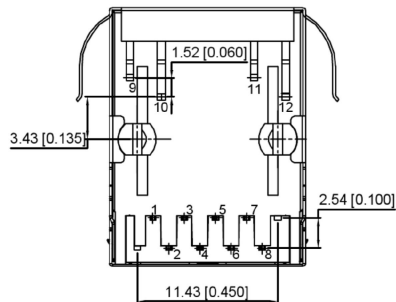

BOTTOM VIEW

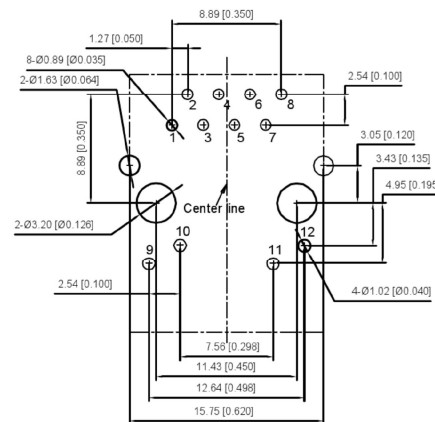



RECOMMENDED PCB LAYOUT
VIEWED FROM COMPONENT SIDE

Electrical 电气:

- Turn ratio 匝数比: 1~2: J1~J2=1CT:1CT(±2%)
3~6: J3~J6=1CT:1CT(±2%)
- OCL: 350uH Min. at 100KHz 100mV 8mA DC.
- Insertion Loss 插入损耗: -1.0 dB Max 1~100MHz.
- Return loss 回波损耗: -20dB Min 1~10MHz.
-16dB Min 10~30MHz.
-12dB Min 30~60MHz.
-10dB Min 60~80MHz.
- Cross talk: -40dB Min 1~30MHz;
-35dB Min 30~60MHz;
-30dB Min 60~100MHz;
- CMR: -30dB Min 1~100MHz;
- Hi-Pot: 1500V AC&2250V DC 6S 1mA PRI TO SEC.

LED Specification

Standard LED Color	LED Wavelength	Forward(I _F)	Forward(V _F)
Green	568nm	20mA	1.95~2.45V
Yellow	585nm	20mA	1.7~2.2V

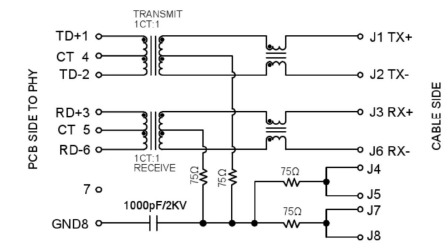

MATERIAL 材料:

HOUSING : PBT,UL94V-0,BLACK.

TERMINALS BRACKET 端子支架: PBT,UL94V-0,BLACK.

SHIELD 保护物: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.

TERMINAL 端子: PHOSPHOR BRONZE C5210,T=0.35MM,
GOLD PLATING ON CONTACT AREA.

MECHANICAL 机械:

DURABILITY 耐用性: 750 CYCLES MIN.

MATING FORCE 配合力: 23N MAX.

OPERATING TEMPERATURE 工作温度: -40°C~+85°C.

STORAGE TEMPERATURE 储存温度: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH "MM"

				ANGULAR	±5°		DSND		SCALE: N/A	MODEL TYPE: RJ JACK		
				L ≤ 4	±0.2		DWN		VIEW: 	PART NO.:		
				4 < L ≤ 16	±0.3		CHKD		UNIT: mm/in	DWG NO.:		
				16 < L ≤ 63	±0.4		APPD		SIZE: A4	X01AB002FA2DDB		
				L > 63	±0.5		UNSPECIFIED TOLERANCES			WEIGHT	SHEET	REVISION
REVISIONS				DATE	REVISED	APPROVED	DONG GUAN XI BANG ELECTRONIC CO., LTD				1/1	A0
www.alpsr.com www.gdxjdz.com www.xbswitch.com												