




LEFT SIDE VIEW

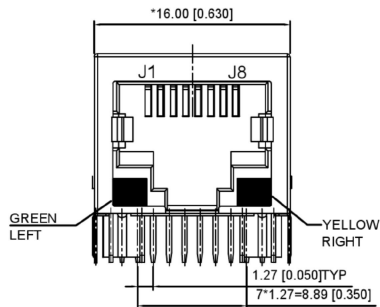



FRONT VIEW




BOTTOM VIEW

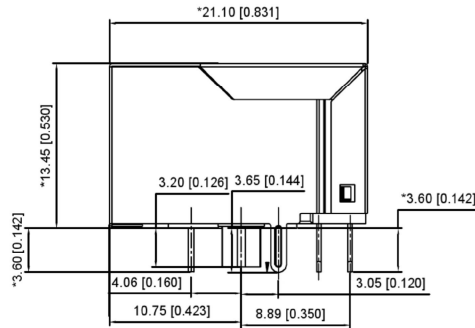

RIGHT SIDE VIEW

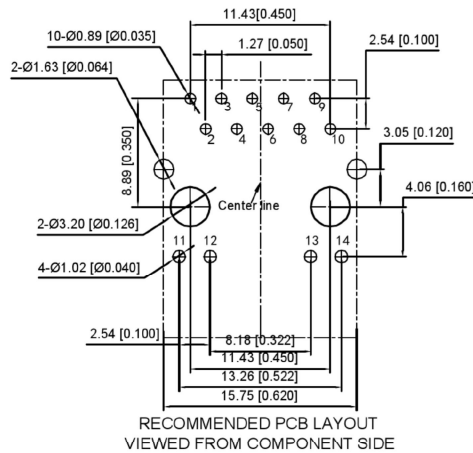

BACK VIEW




TOP VIEW

Electrical 电气:

1. Turn ratio 匝数比: 1~2: J1~J2=1CT:1CT(±2%)
3~4: J3~J6=1CT:1CT(±2%)
7~8: J4~J5=1CT:1CT(±2%)
9~10: J7~J8=1CT:1CT(±2%)
2. OCL: 180uH Min. at 100KHz 100mV
3. Insertion Loss 插入损耗: -1.0 dB Max 1~125MHz.
4. Return loss 回波损耗: -20dB Min 1~40MHz.
-20+15LOG10(f/40MHz) Min 40~200 MHz.
5. Cross talk: -30dB TYP 1~125MHz;
6. CMR: -30dB Min 30~200MHz;
7. Hi-Pot: 2250V DC VRMS MIN AT 60 SECONDS

LED Specification

Standard LED Color	LED Wavelength	Forward(A)	Forward(V)
Green	525nm	20mA	1.8~2.45V
Yellow	585nm	20mA	1.7~2.2V

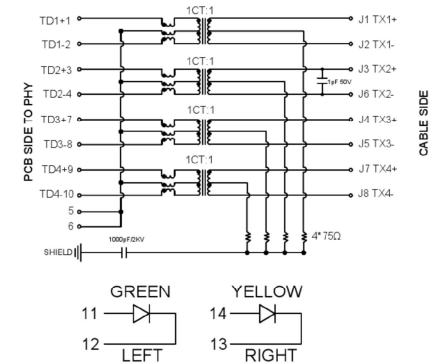

MATERIAL 材料:

HOUSING 外壳: PBT,UL94V-0,BLACK.

TERMINALS BRACKET 端子支架: PBT,UL94V-0,BLACK.

SHIELD 保护物: C2680,T=0.20MM,NICKEL PLATING ON ALL AREA.

TERMINAL 端子: PHOSPHOR BRONZE C5210,T=0.35MM,
GOLD PLATING ON CONTACT AREA.

MECHANICAL 机械:

DURABILITY 耐用性: 750 CYCLES MIN.

MATING FORCE 配合力: 23N MAX.

OPERATING TEMPERATURE 工作温度: -40°C~+85°C.

STORAGE TEMPERATURE 储存温度: -40°C~+85°C.

ALL CRITICAL DIMENSIONS WITH ""

							DSND		SCALE: N/A	MODEL TYPE: RJ JACK		
							DWN		VIEW: 	PART NO.:		
							CHKD		UNIT: mm/in	DWG NO.:		
							APPD		SIZE: A4	X01AQ285AA2ADA2		
							DONG GUAN XI BANG ELECTRONIC CO., LTD					
REVISIONS						UNSPECIFIED TOLERANCES						
www.alpsr.com www.gdxdz.com www.xbswitch.com												