

FRONT EDGE OF CONNECTOR
PCB LAYOUT (T=1.60mm)

NOTES:

1.材料规格 MATERIAL SPECIFICATION:

- 1) 胶壳 HOUSING MATERIAL:BLACK LCP ROHS;
- 2) 外壳 SHELL MATERIAL:C2680 T=0.30
电镀 PLATING:NICKE;
- 3) 端子 TERMINAL: C5191 T=0.25
电镀 PLATING:SEMI GOLD TIN G/F;


2.电气特性 ELECTRICAL CHARACTERISTIC:

- 1) 绝缘电阻 INSULATION RESISTANCE: 1000MΩ MIN;
- 2) 接触电阻 CONTACT RESISTANCE: 30mΩ MAX;
- 3) 耐压 WITHSTANDING VOLTAGE: 500V AC;

3.机器特性 MECHANICAL CHARACTERISTICS:

- 1) 插入力 INSERTION FORCE:3.57Kgf Max;
- 2) 拔出力 EXTRACTION FORCE:1.02Kgf Min;

U221-04XN-4BVS65-S5D

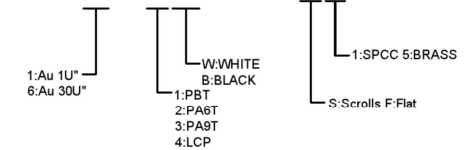

				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
DATE	REVISED	APPROVED			
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND	SCALE: N/A	MODEL TYPE:	USB 2.0		
DWN	VIEW:	PART NO.:			
CHKD	UNIT: mm/in	DWG NO.:	U221-04XN-4BVS65-S5D		
APPD	SIZE: A4	WEIGHT	SHEET	REVISION	
			1/1	A0	