



标准&定制开关连接器产品制造商
DONG GUAN XI BANG ELECTRONICS CO., LTD.

规格书

SPECIFICATION

CUSTOMER NAME 客户名称: _____
 CUSTOMER NO. 客户编号: _____
 SERIES 系列: RJ12 插座连接器
 MODEL NO. 型号: _____
 DRAWING NO. 图形号: RJ12 socket connector

If specification of this product meets your request, please confirm all the items of it and return to us with signature and stamp, it will be basis of our production and record. Thanks your cooperation in advance!

若此产品规格符合贵司要求，敬请确认此规格书内所有项目
 并签名和盖章后回传给我司，以作我司产品制作之
 依据和存档之用，多谢合作！

EXAMINE & APPROVAL 审批

| APPROVE 接受 | NOT APPROVE 不接受 |
|---|-----------------|
| SIGNATURE 签署 STAMP 盖章 DATE 日期 | |

| PREPARED BY. 制表人 | CHECKED BY. 校对 | APPROVED BY. 审核 | APPROVAL BY. 批准 |
|--|--|---|---|
| <div style="border: 1px solid red; padding: 2px;">研发部</div> <div style="border: 1px solid red; padding: 2px;">戴海明</div> <div style="border: 1px solid red; padding: 2px;">2022. 06. 08</div> | <div style="border: 1px solid red; padding: 2px;">品质部</div> <div style="border: 1px solid red; padding: 2px;">黄自清</div> <div style="border: 1px solid red; padding: 2px;">2022. 06. 08</div> | <div style="border: 1px solid red; padding: 2px;">工程部</div> <div style="border: 1px solid red; padding: 2px;">庞军</div> <div style="border: 1px solid red; padding: 2px;">2022. 06. 08</div> | <div style="border: 1px solid red; padding: 2px;">总经办</div> <div style="border: 1px solid red; padding: 2px;">吴量</div> <div style="border: 1px solid red; padding: 2px;">2022. 06. 08</div> |

东莞市溪榜电子有限公司


Dong guan Xi Bang Electronics Co., Ltd
 地址：广东省东莞市黄江镇合路工业区
 Address: He Lu Industrial Zone, Huangjiang Town
 , Dongguan City, Guangdong Province
 Tel: (0769)82055138/82056828
 Fax: (0769)83663452

邮箱: admin@alspr.com switch@alspr.com
<http://www.alspr.cn/> <http://www.alspr.com/>

Dong Guan XB Electronics Co., Ltd

Account Number : 705540238
 Bank Name : Citibank N. A. , Hong Kong Branch
 Country/Region: Hong Kong
 Bank Code: 006
 Bank Address : 3 Garden Road, Central, Hong Kong
 SWIFT/BIC : CITIHKHX (CITIHKHXXXX* If 11 characters are required)

MAil : HK@ALPSR.CN XB@ALPSR.CN
 Quality core! Afterburner for Made in China!

| | | | | |
|--|--------------|-------------|-------------|-----------|
|  XB Connectivity Switch Connector | Doc. No. | SP-A0162-03 | Page No. | 1/6 |
| | Date Issued | 2020-04-06 | Prepared by | Josephine |
| | Date revised | 2020-11-23 | checked by | Jay |
| Product Specification | Rev. No. | 01 | Approved by | Mei Chen |
| Title: RJ45&RJ11 Series Connector | | | | |

1. SCOPE (适用范围)

This specification covers the performance, tests and quality requirements for the **RJ Series Connector**. (本规范涵盖了盖 **RJ 系列**连接器的性能、测试和质量要求。)

2. PRODUCT DESCRIPTION (产品描述)

| DESCRIPTION (描述) | Part Number (料号) |
|--------------------|--------------------|
| RJ11 | X04AHIWA1DY1017 |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |

3. APPLICABLE DOCUMENT (适用文件)


The following documents form a part of this specification to the extent specified herein. In the event of conflict between the requirements of this specification and the product drawing, the product drawing shall take precedence. In the event of conflict between the requirements of this specification and the referenced documents, this specification shall take precedence. (下列文件构成本规范的一部分，在此规定的范围内。本规范要求与产品图纸有冲突时，以产品图纸为准。如果本规范的要求与参考文件发生冲突，应以本规范为准。)

4. REQUIREMENTS (要求)

4.1. Design and Structure (设计和结构)

Product shall be of the design, structure and physical dimensions specified on the applicable product drawing. (产品的设计、结构和物理尺寸参考所适用的产品图纸)

4.2. Materials/ Finish (材料/表面处理)

| | | | | |
|--|--------------|-------------|-------------|-----------|
|  XB Connectivity Switch Connector | Doc. No. | SP-A0162-03 | Page No. | 2/6 |
| | Date Issued | 2020-04-06 | Prepared by | Josephine |
| | Date revised | 2020-11-23 | checked by | Jay |
| Product Specification | Rev. No. | 01 | Approved by | Mei Chen |
| Title: RJ45&RJ11 Series Connector | | | | |

Materials used in the structure of product shall be as specified on the applicable product drawing. (产品结构中使用的材料参考所适用的产品图纸)

4.3. Ratings (额定功率)

| Item (项目) | Standard (标准) |
|------------------------------------|--|
| Rated Voltage (Maximum) 额定电压 | 125V AC |
| Rated Current (Maximum) 额定电流 | 1.5A |
| Operating temperature range 工作温度范围 | -40°C ~ +85°C From -40 to +85 degree centigrade |
| Storage Temperature Range 储存温度范围 | -40°C ~ +85°C From -40 to +85 degree centigrade |

5. TEST STANDARD (测试条件)

5.1 Unless otherwise specified, the standard range of atmospheric conditions for making measurements and tests are as follows (除另有说明外，用以进行测量和测试的标准环境条件范围如下)

Ambient temperature (环境温度) : -15°C to 35°C

Normal humidity (正常湿度) : 25% to 85%


Air pressure (气压) : 86Kpa to 106Kpa

5.2 However if doubt arises on the decision based on the measured Values under the above-mentioned Conditions. The following conditions shall be employed: (但是在对判定产生疑问时,按下述状态实施)

Temperature (温度) : 20±2°C

Relative humidity (相对湿度) : 65±5%

Air pressure (气压) : 86Kpa to 106Kpa

| | | | | |
|--|--------------|-------------|-------------|-----------|
|  XB Connectivity Switch Connector | Doc. No. | SP-A0162-03 | Page No. | 3/6 |
| | Date Issued | 2020-04-06 | Prepared by | Josephine |
| | Date revised | 2020-11-23 | checked by | Jay |
| Product Specification | Rev. No. | 01 | Approved by | Mei Chen |
| Title: RJ45&RJ11 Series Connector | | | | |

6. PERFORMANCE AND TEST DESCRIPTION (性能和测试类型)


6.1 APPEARANCE (外观)

| ITEM | DESCRIPTION (类型) | TEST CONDITION (测试条件) | REQUIREMENT (要求) |
|------|---------------------------|-----------------------|--|
| 1 | Appearance (外观) | Visual. (目视) | Should not have any flaw Scratch discoloration and crushed (无任何裂痕、刮伤、 污染和变形) |

6.2 ELECTRICAL (电气)

| ITEM | DESCRIPTION (类型) | TEST CONDITION (测试条件) | REQUIREMENT (要求) |
|------|---|---|---|
| 1 | Low level contact resistance. (接触电阻) | Subject mated contacts assemnled housing to 20 mV maximum 100mA. Measured from plug side to PCB side. (组装好的端子施以最大电压 20mV 最大电流 100mA 从接触处到 PCB 端测试) EIA-364-23B | 40 mΩ Max. (Initial 初始) |
| 2 | Insulation Resistance. (绝缘电阻) | Mated connectors with 500±10%VDC between adjacent contacts or ground. (对 组装好的独立端子或接地物之间施以 500± 10% VDC 的电压测试) EIA-364-21C | 500 MΩ min. |
| 3 | Dielectric withstanding Voltage. (耐电压) | Mated connectors with 1000±5% VDC for 1minute 0.5mA between adjacent contacts or ground. (对组装好的独立端子 或接地物之间施加交流 1000 VAC 0.5mA 电流 1 分钟) EIA-364-20B | Without damaged such as arcing or breakdown etc. (无击穿、闪烁现象不能有如跳 电, 击穿, 破裂损坏) |

6.3 MECHANICAL (机械)

| | | | | |
|--|--------------|-------------|-------------|-----------|
|  XB Connectivity Switch Connector | Doc. No. | SP-A0162-03 | Page No. | 4/6 |
| | Date Issued | 2020-04-06 | Prepared by | Josephine |
| | Date revised | 2020-11-23 | checked by | Jay |
| Product Specification | Rev. No. | 01 | Approved by | Mei Chen |
| Title: RJ45&RJ11 Series Connector | | | | |

| ITEM | DESCRIPTION (类型) | TEST CONDITION (测试条件) | REQUIREMENT (要求) |
|------|--|---|---|
| 1 | Connector Mating Force (插入力) | Mating connectors at maximum rate 25±3mm Per minute and measure the force. (测试组装好值连接器在每分钟 25±3mm 的速度下之插入力) EIA-364-13B | 22N Max |
| 2 | Durability (耐久) | Operation Speed :10 to 20 cycle /min. (测试速度: 每分钟 10 到 20 个循环) Durability Cycles:750 Cycles (测试次数: 750 Cycles Min) EIA-364-9C | No damage Termination Resistance:40mΩMAX (测试后无损坏, 最大接触阻抗 40m Ω) |
| 3 | Plug Retention Force (Plug 保持力) | Put the connector and plug in a vertical position, hang a 77.5N object at the bottom of the plug for 60s±5s. (测试扣合好之连接器与 PLUG 垂直放置, PLUG 底部施以 77.5N Min 力, 自然吊重 60s±5s。) | 77.5N Min |

6.4 ENVIRONMENTAL (环境)

| ITEM | DESCRIPTION (类型) | TEST CONDITION (测试条件) | REQUIREMENT (要求) |
|------|-----------------------------|---|---|
| 1 | Solder ability (可焊性) | Immerse the solder pin of the connector in the solder bath at 235°C±5°C for 5±0.5 seconds. After dipped the pin in the flux of RAM or R type 5 seconds. (将端子脚浸入 RAM 或 R tyep 的助焊剂中 5-9 秒, 然后将端子脚浸入 235°C±5°C 的锡炉中 5±0.5 秒) | More than 95% of the dipped surface shall be wet with solder. (锡附着的面积应超过浸入表面的 95%以上) Mechanical characteristics shall be satisfied. (机械特性必须符合规格) |




| | | | |
|--------------|-------------|-------------|-----------|
| Doc. No. | SP-A0162-03 | Page No. | 5/6 |
| Date Issued | 2020-04-06 | Prepared by | Josephine |
| Date revised | 2020-11-23 | checked by | Jay |
| Rev. No. | 01 | Approved by | Mei Chen |

Product Specification

Title: RJ45&RJ11 Series Connector

| | | | |
|---|--|--|--|
| 2 | Resistance to Wave Soldering Heat (耐焊性) | <p>Place the connector on the P.C.Board, then immerse the solder pin up to the surface of the board in the solder bath at Solder Temp. (将连接器置于 PCB 板上, 然后将露出 PCB 板面的 PIN 脚部分浸入锡炉中, 260±5°C, 5±0.5sec.)</p> <p>EIA-364-56C</p> | <p>Without deformation of case or excessive lossen. (塑胶不能有明显的变形或损坏)</p> |
| 3 | Moisture Resistance (耐潮湿) | <p>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 30 minute before measurements are made: 样品按下列条件进行耐潮湿试验, 试验后在正常温度和湿度条件下放置 30 分钟后测定</p> <p>(1) Temperature 温度: 40±2°C (2) Relative humidity 相对湿度: 90 to 95% (3) Time 时间: 48 hours</p> <p>Water drops shall be removed. 擦除水珠</p> | <p>Contact resistance 接触电阻: 40 mΩ Max. Insulation resistance 绝缘电阻: 500 MΩ Min. There shall be no defects in appearance or in the mechanical functions. (无论是在外观上还是在机械功能上, 都不得有任何缺陷)</p> |
| 4 | TLow Temperature Resistance (耐低温) | <p>Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 30 minute before measurements are made: 样品按下列条件进行耐低温试验, 试验后在正常温度和湿度条件下放置 30 分钟后测定</p> <p>(1) Temperature 温度: -40±2°C (2) Time 时间: 96 hours</p> <p>Water drops shall be removed. 擦除水珠</p> | <p>Contact resistance 接触电阻: 40 mΩ Max. Insulation resistance 绝缘电阻: 500 MΩ Min. There shall be no defects in appearance or in the mechanical functions. (无论是在外观上还是在机械功能上, 都不得有任何缺陷)</p> |

| | | | | |
|--|--------------|-------------|-------------|-----------|
|  XB Connectivity Switch Connector | Doc. No. | SP-A0162-03 | Page No. | 6/6 |
| | Date Issued | 2020-04-06 | Prepared by | Josephine |
| | Date revised | 2020-11-23 | checked by | Jay |
| Product Specification | Rev. No. | 01 | Approved by | Mei Chen |
| Title: RJ45&RJ11 Series Connector | | | | |

| | | | |
|---|-------------------------------|---|---|
| 5 | Salt Spray Test (盐雾试验) | <p>Subject mated and unmated connectors should betested according to the condition listed below (连接器如下条件下测试) :Temperature (温度) :(35±2)°C Humidity (湿度) :(95- 98)%(R.H) PH (浓度) :6.5-7.2 Duration (持续时间) : (1u":8H;1.5u":12H;3u":24H;6u":over48H.)</p> <p>It shall be subjected to standard atmospheric condition 1 h. after removing the salt deposits. (物体在移出盐水槽后应置于标准大气条件中一个小时后再进行测量动作)</p> <p>It should meet the contact resistance.Non-contact area(5±1)%salt-solution(35±2)°C for 8 hours. (待测品非接触部位测试条件: 温度: (35±2)°C, 盐水密度: (5±1)%, 时间: 8 小时)</p> <p>EIA-364-26B</p> | <p>Appearance shall no rust, oxidation, corrosion and other undesirable phenomena. (外观须无生锈、氧化、腐蚀等不良现象)</p> <p>Contact resistance 接触电阻: 40 mΩ Max.</p> |
|---|-------------------------------|---|---|

7. SOLDERING 焊接 :

- 7.1. Wave soldering (波峰焊) : DIP Suggestions solder temperature at 240°C max.5 seconds . DIP 型推荐焊接焊锡温度为 235°C最多 5 秒
- 7.2. Hand soldering (手焊) : Use a soldering iron of 30 watts controlled at 350°C approximately 5 seconds. while applying solder.
使用 30W 烙铁控制温度在 350°C,焊接时长约 5 秒
- 7.3. Reflow soldering profile(回炉焊):When the maximum temperature of the reflow furnace is 260 °C and the temperature is 260 °c. 10 seconds MAX. (reference) SMT 型回焊炉最高温度为 260°C · 温度为 260°C时 , 最长时间不超过 10 秒 (如图)




XB Connectivity

| | | | |
|--------------|-------------|-------------|-----------|
| Doc. No. | SP-A0162-03 | Page No. | 7/6 |
| Date Issued | 2020-04-06 | Prepared by | Josephine |
| Date revised | 2020-11-23 | checked by | Jay |
| Rev. No. | 01 | Approved by | Mei Chen |

Product Specification

Title: RJ45&RJ11 Series Connector

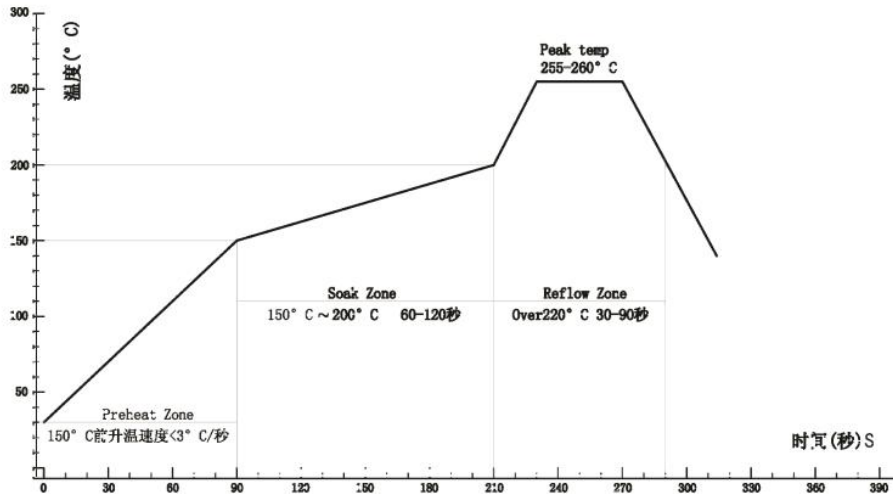

| Rev. | Description | Date revised | Created/ Revised by |
|------|-------------|--------------|------------------------|
| 01 | New Release | 2020/04/30 | Josephine Lin |
| | | | |
| | | | |
| | | | |