

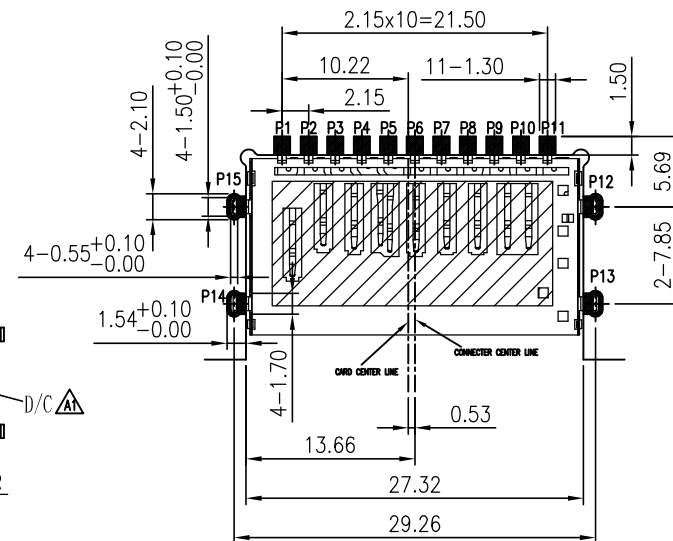
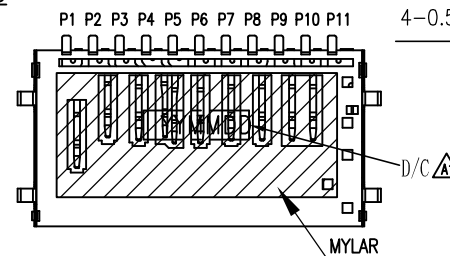


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0	ECN1801006	△开关PIN加宽, 改善电测下趴	2018.01.15	SUPER	HFL	YONG
A1	ECN1805002	△根据客户要求变更DC	2018.05.03	SUPER	HFL	YONG



RECOMMENDED P.C.B LAYOUT
TOLERANCE: ±0.05

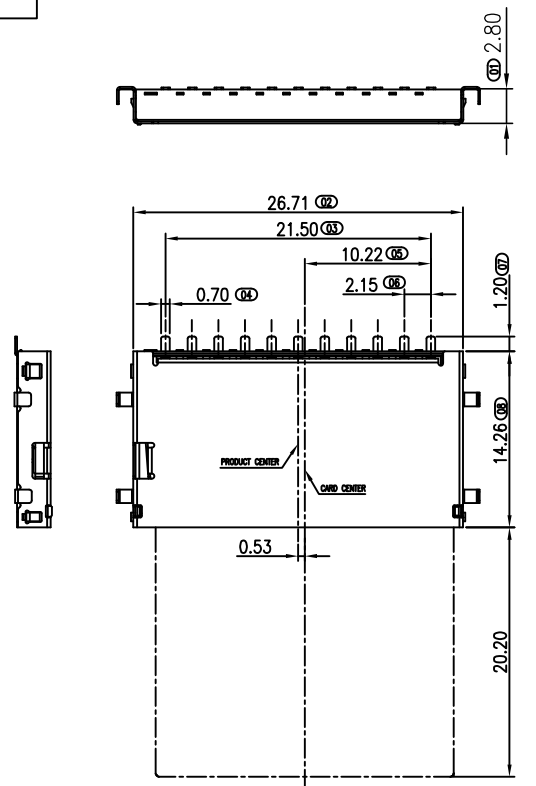

Pin Define

Connector Pin No.	SD Card Pin No.	Pin Define
P1	P9	DAT2
P2	P1	DAT3
P3	P2	CMD
P4		CD
P5	P3	VSS1
P6	P4	VDD
P7	P5	CLK
P8	P6	VSS2
P9	P7	DAT0
P10	P8	DAT1
P11		WP
P12~P15		GND

WITHOUT CARD	CARD INSERTED:LOCK	CARD INSERTED:UNLOCK
W/P GND	W/P GND	W/P GND
C/D VSS1	C/D VSS1	C/D VSS1
P3	P3	P3

NOTES:

1.MATERIAL

1.1 HOUSING : LCP S475 UL94 V-0,BLACK COLOR.

1.2 SHELL:STAINLESS STEEL SUS304.

1.3 CONTACT:COPPER ALLOY C5210.

2.FINISH:

2.1 CONTACT :GOLD PLATED ON CONTACT AREA,

MATTE TIN 100u" MIN ON SOLDER TAIL AREA.

50u"MIN NICKEL PLATING OVERALL

2.2 SHELL: 30u" MIN SOLDERABLE NICKEL PLATING OVERALL

MILLIMETERS	INCH	UNITS	MM
X° ± 2°	X° ± 2°	MAT'L	
.X ± 0.38	.XX ± 0.015	SEE NOTES	
.XX ± 0.25	.XXX ± 0.010	FINISH	
.XXX ± 0.10	.XXXX ± 0.004	SEE NOTES	
		QTY	
		SEE NOTES	



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

PART NUMBER:
XB-102012012

TITLE:
SD 短体反向沉板2.75

APPD:


DWG NO.:
C-102012012-00

CHKD:

SCALE: 1:1

DR:


SHEET: 1/2




REV: A1

RoHS


客户拉出方向




客户拉出方向

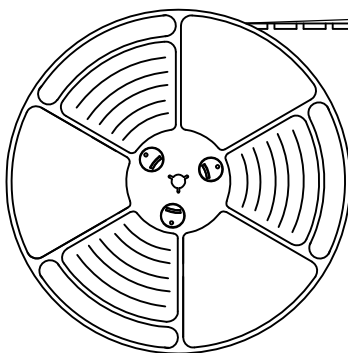


Ø100
Ø330



6 Reels

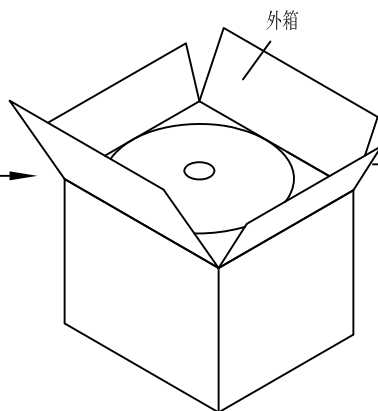


将6卷产品放入箱内




NOTES


- 1.每卷包装数量:600PCS/每卷
- 2.卷带包装方式:

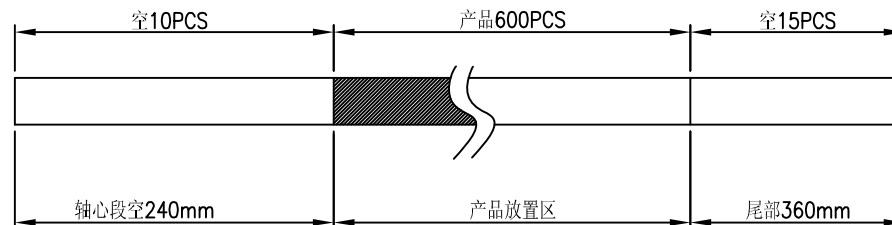

- 3.每箱包装数量:3600PCS/箱

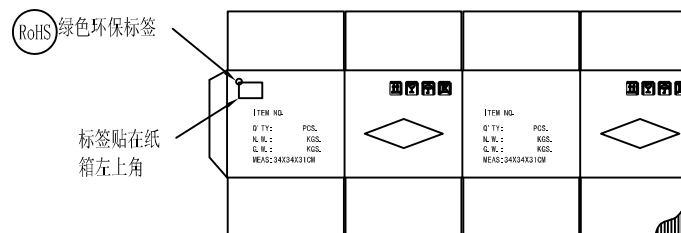

纸箱示意图

MILLIMETERS	INCH	UNITS MM	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ± 2°	MAT'L				
.X ± 0.38	.XX ± 0.015	SEE NOTES	PART NUMBER: XB-102012012		TITLE: SD 短体反向沉板2.75	
.XX ± 0.25	.XXX ± 0.010	FINISH	APPD:		DWG NO.: C-102012012-00	
.XXX± 0.10	.XXXX± 0.004	SEE NOTES	CHKD:			
		QTY	DR:			
		SEE NOTES			SCALE 1:1	SHEET 2/2