



RECOMMENDED P.C.B. LAYOUT



CIRCUIT DIAGRAM

Specifications

Rating: DC 12V/50mA
 Contact Resistance: 500mΩ max
 Insulation resistance: DC100V 60S 100MΩ min
 Dielectric strength: AC250V(50~60HZ)60S min
 Operation force: 160±30gf 180±30gf 240±50gf
 Operating Life: 300,000cycles 100,00cycles
 Travels: 0.13±0.05mm

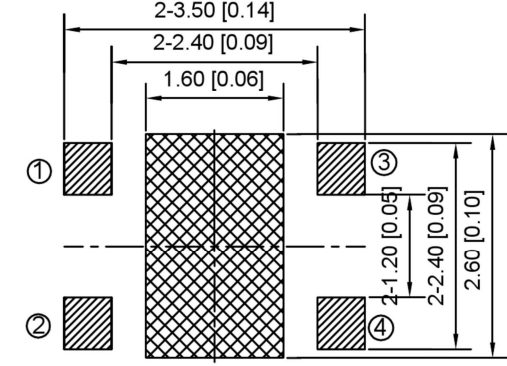

LAND PATTERN PLAN

PAPT NO	TS-2630-X
Operating Force	B:160gf C:260gf
Height	H:0.65

ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
5	NOB	1	POLYAMIDE	BLACK
4	FILM	1	POLYAMIDE	WHITE
3	DOME	2	STAINLESS STEEL	Ag-PLATED
2	HOUSING	1	POLYAMIDE	BLACK
1	TERMINAL	1	PHOSPHOR BRONZE	Ag-PLATED

DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES



DSND	SCALE: N/A	MODEL TYPE: TACT SWITCH
DWN	VIEW:	PART NO.: TS-2630-X
CHKD	UNIT: mm/in	DWG NO.:
APPD	SIZE: A4	