
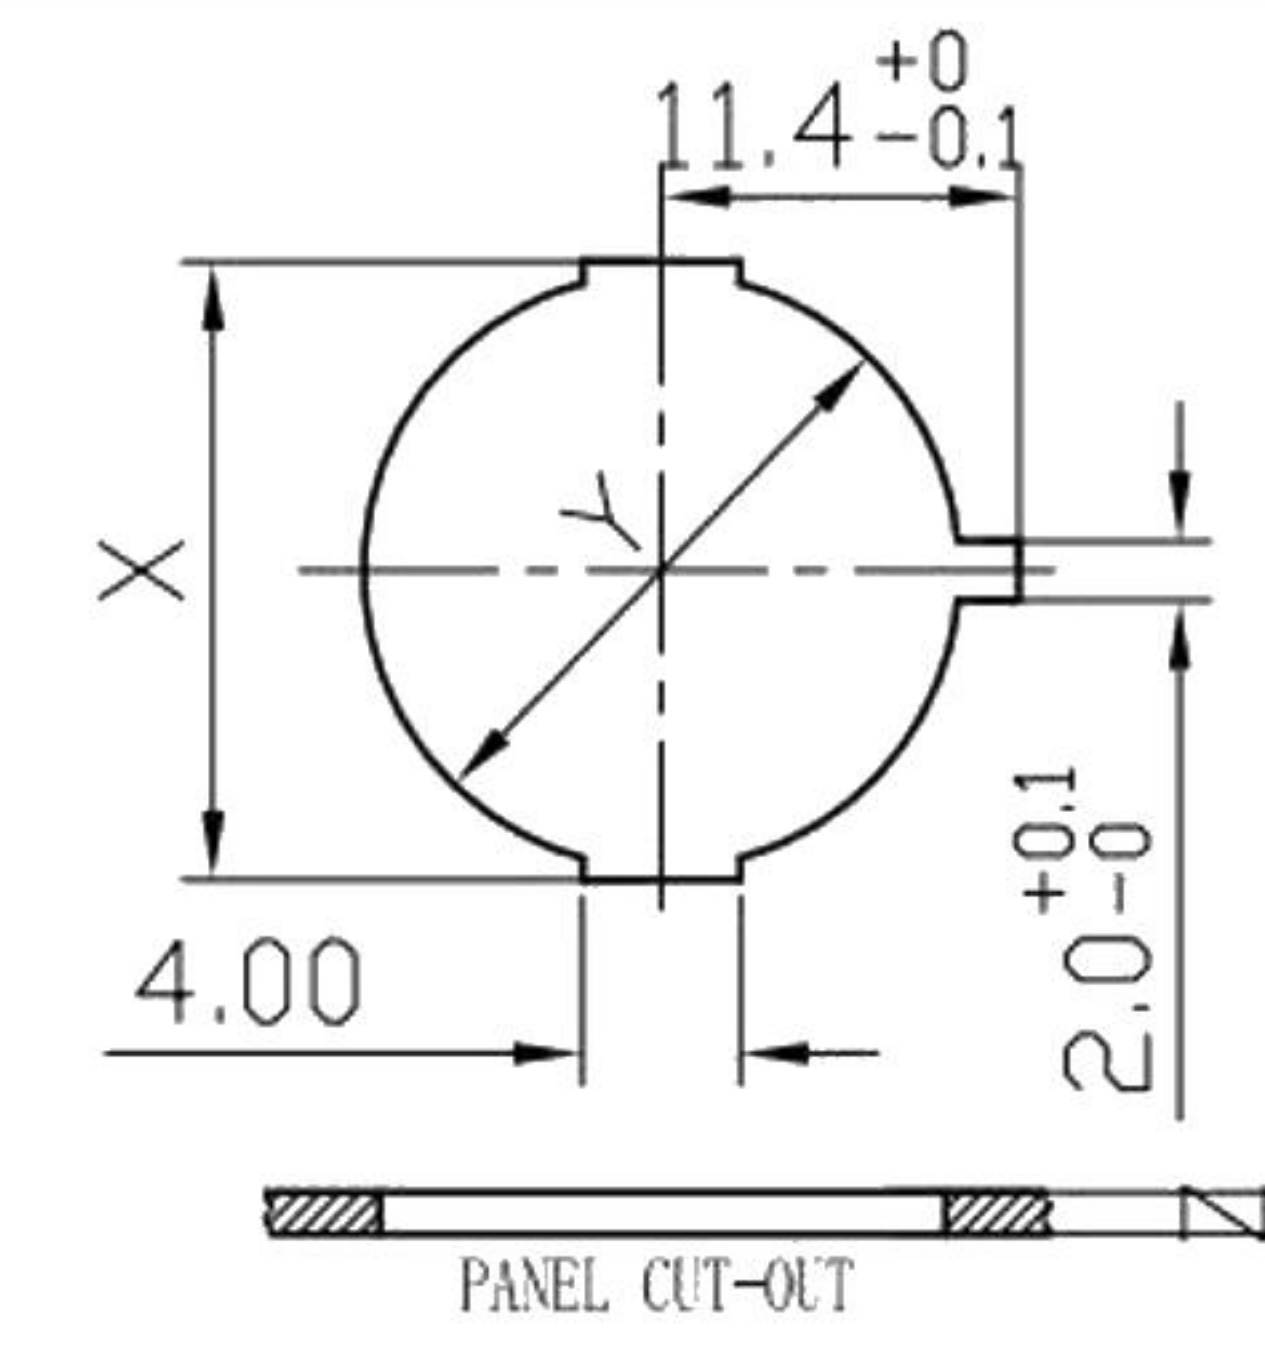
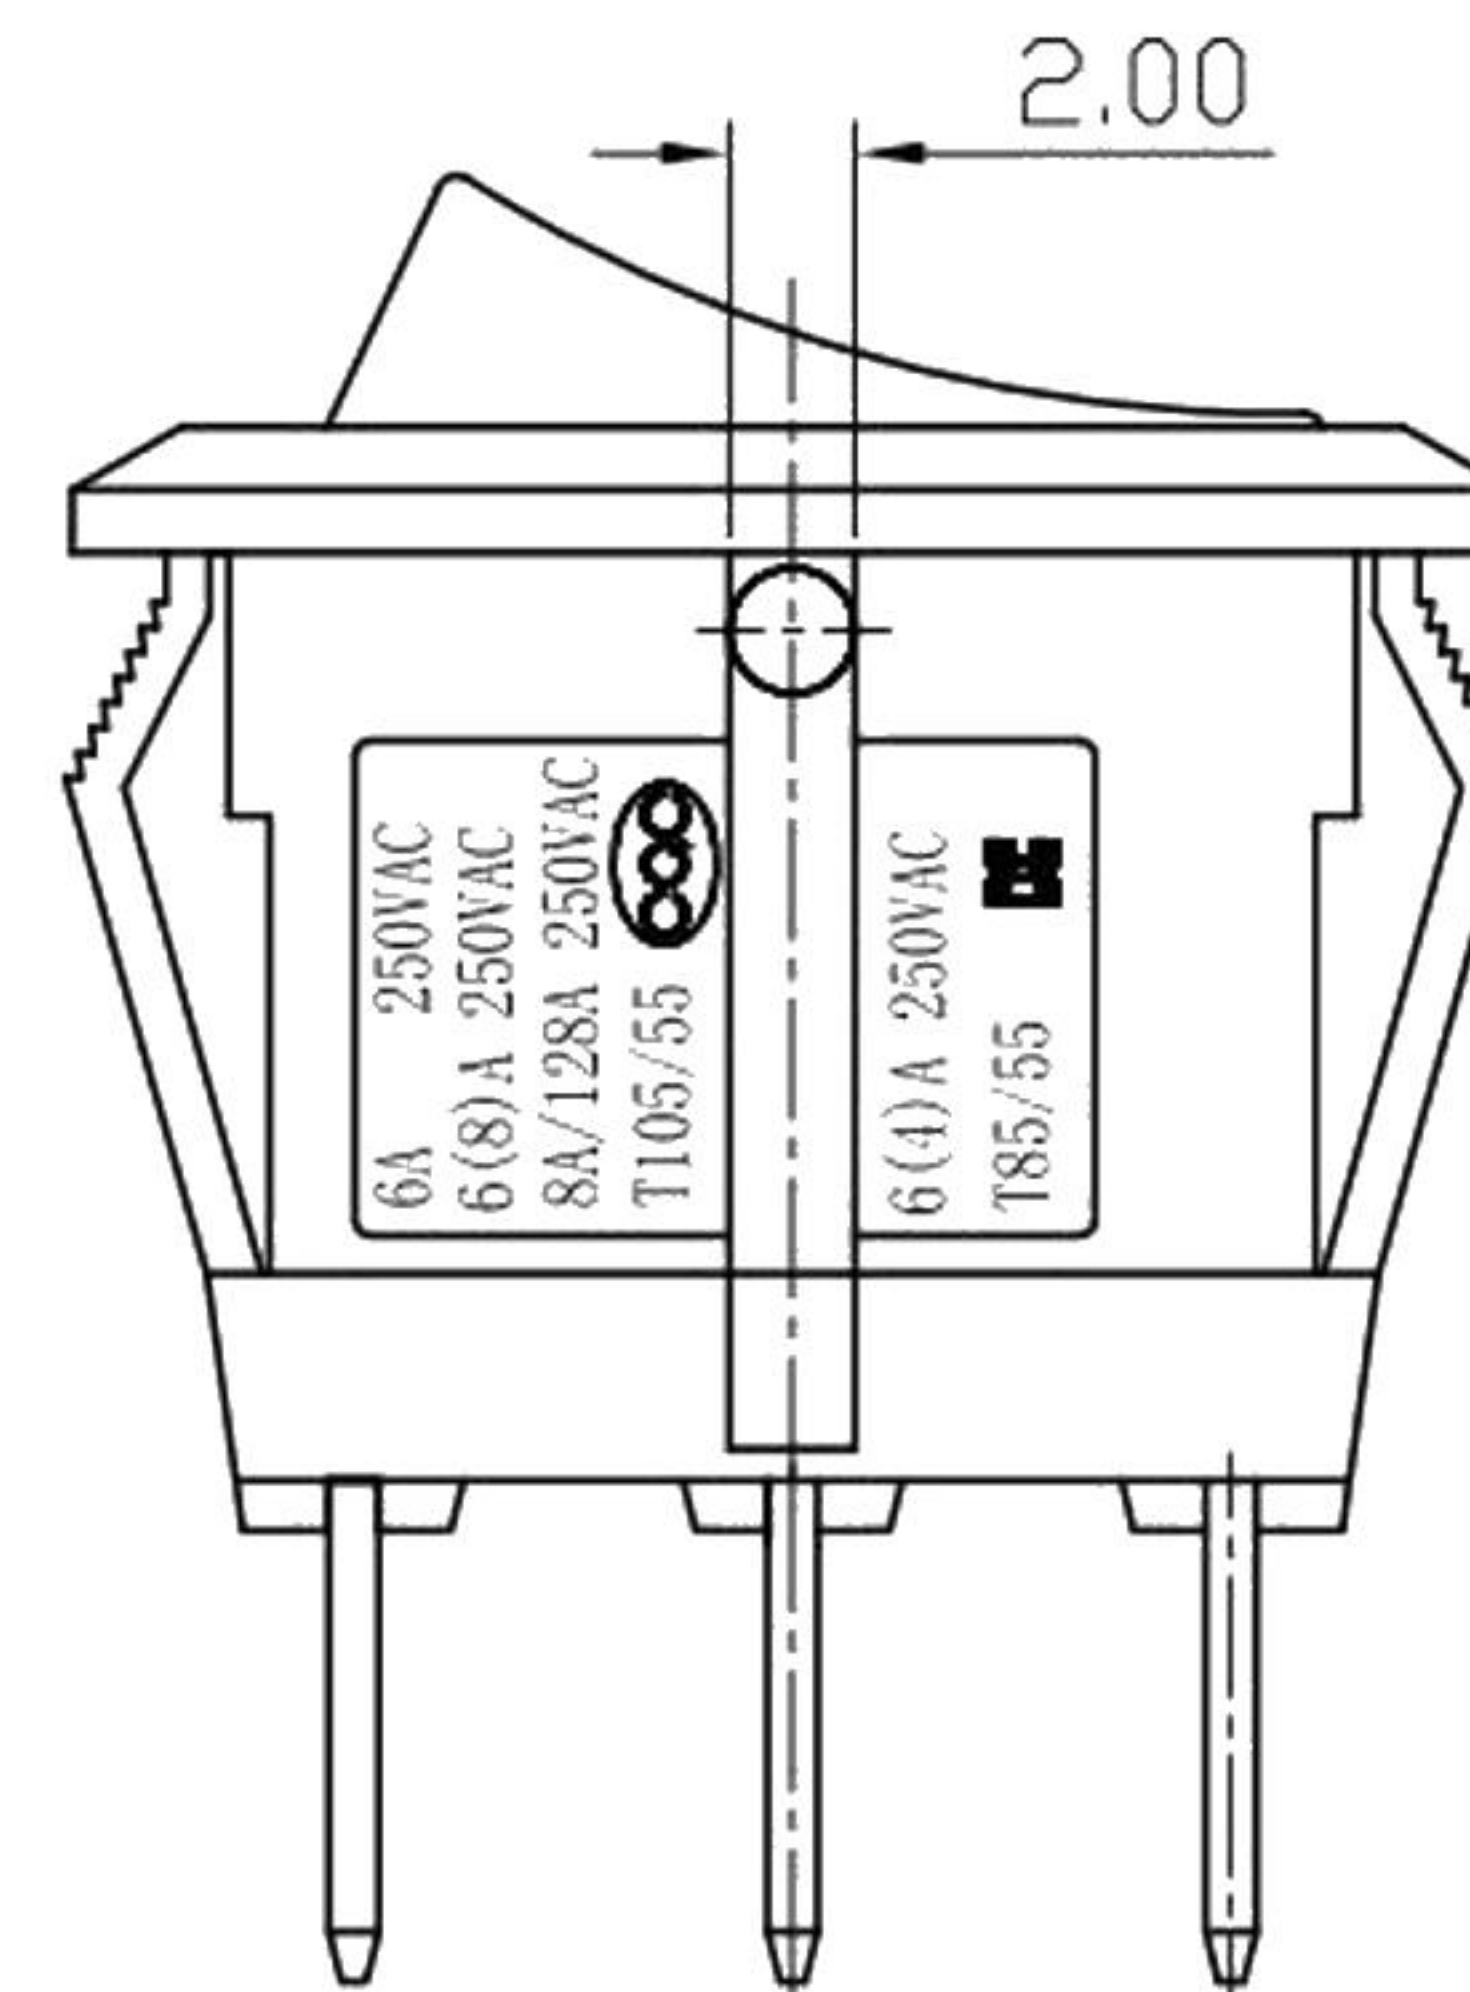
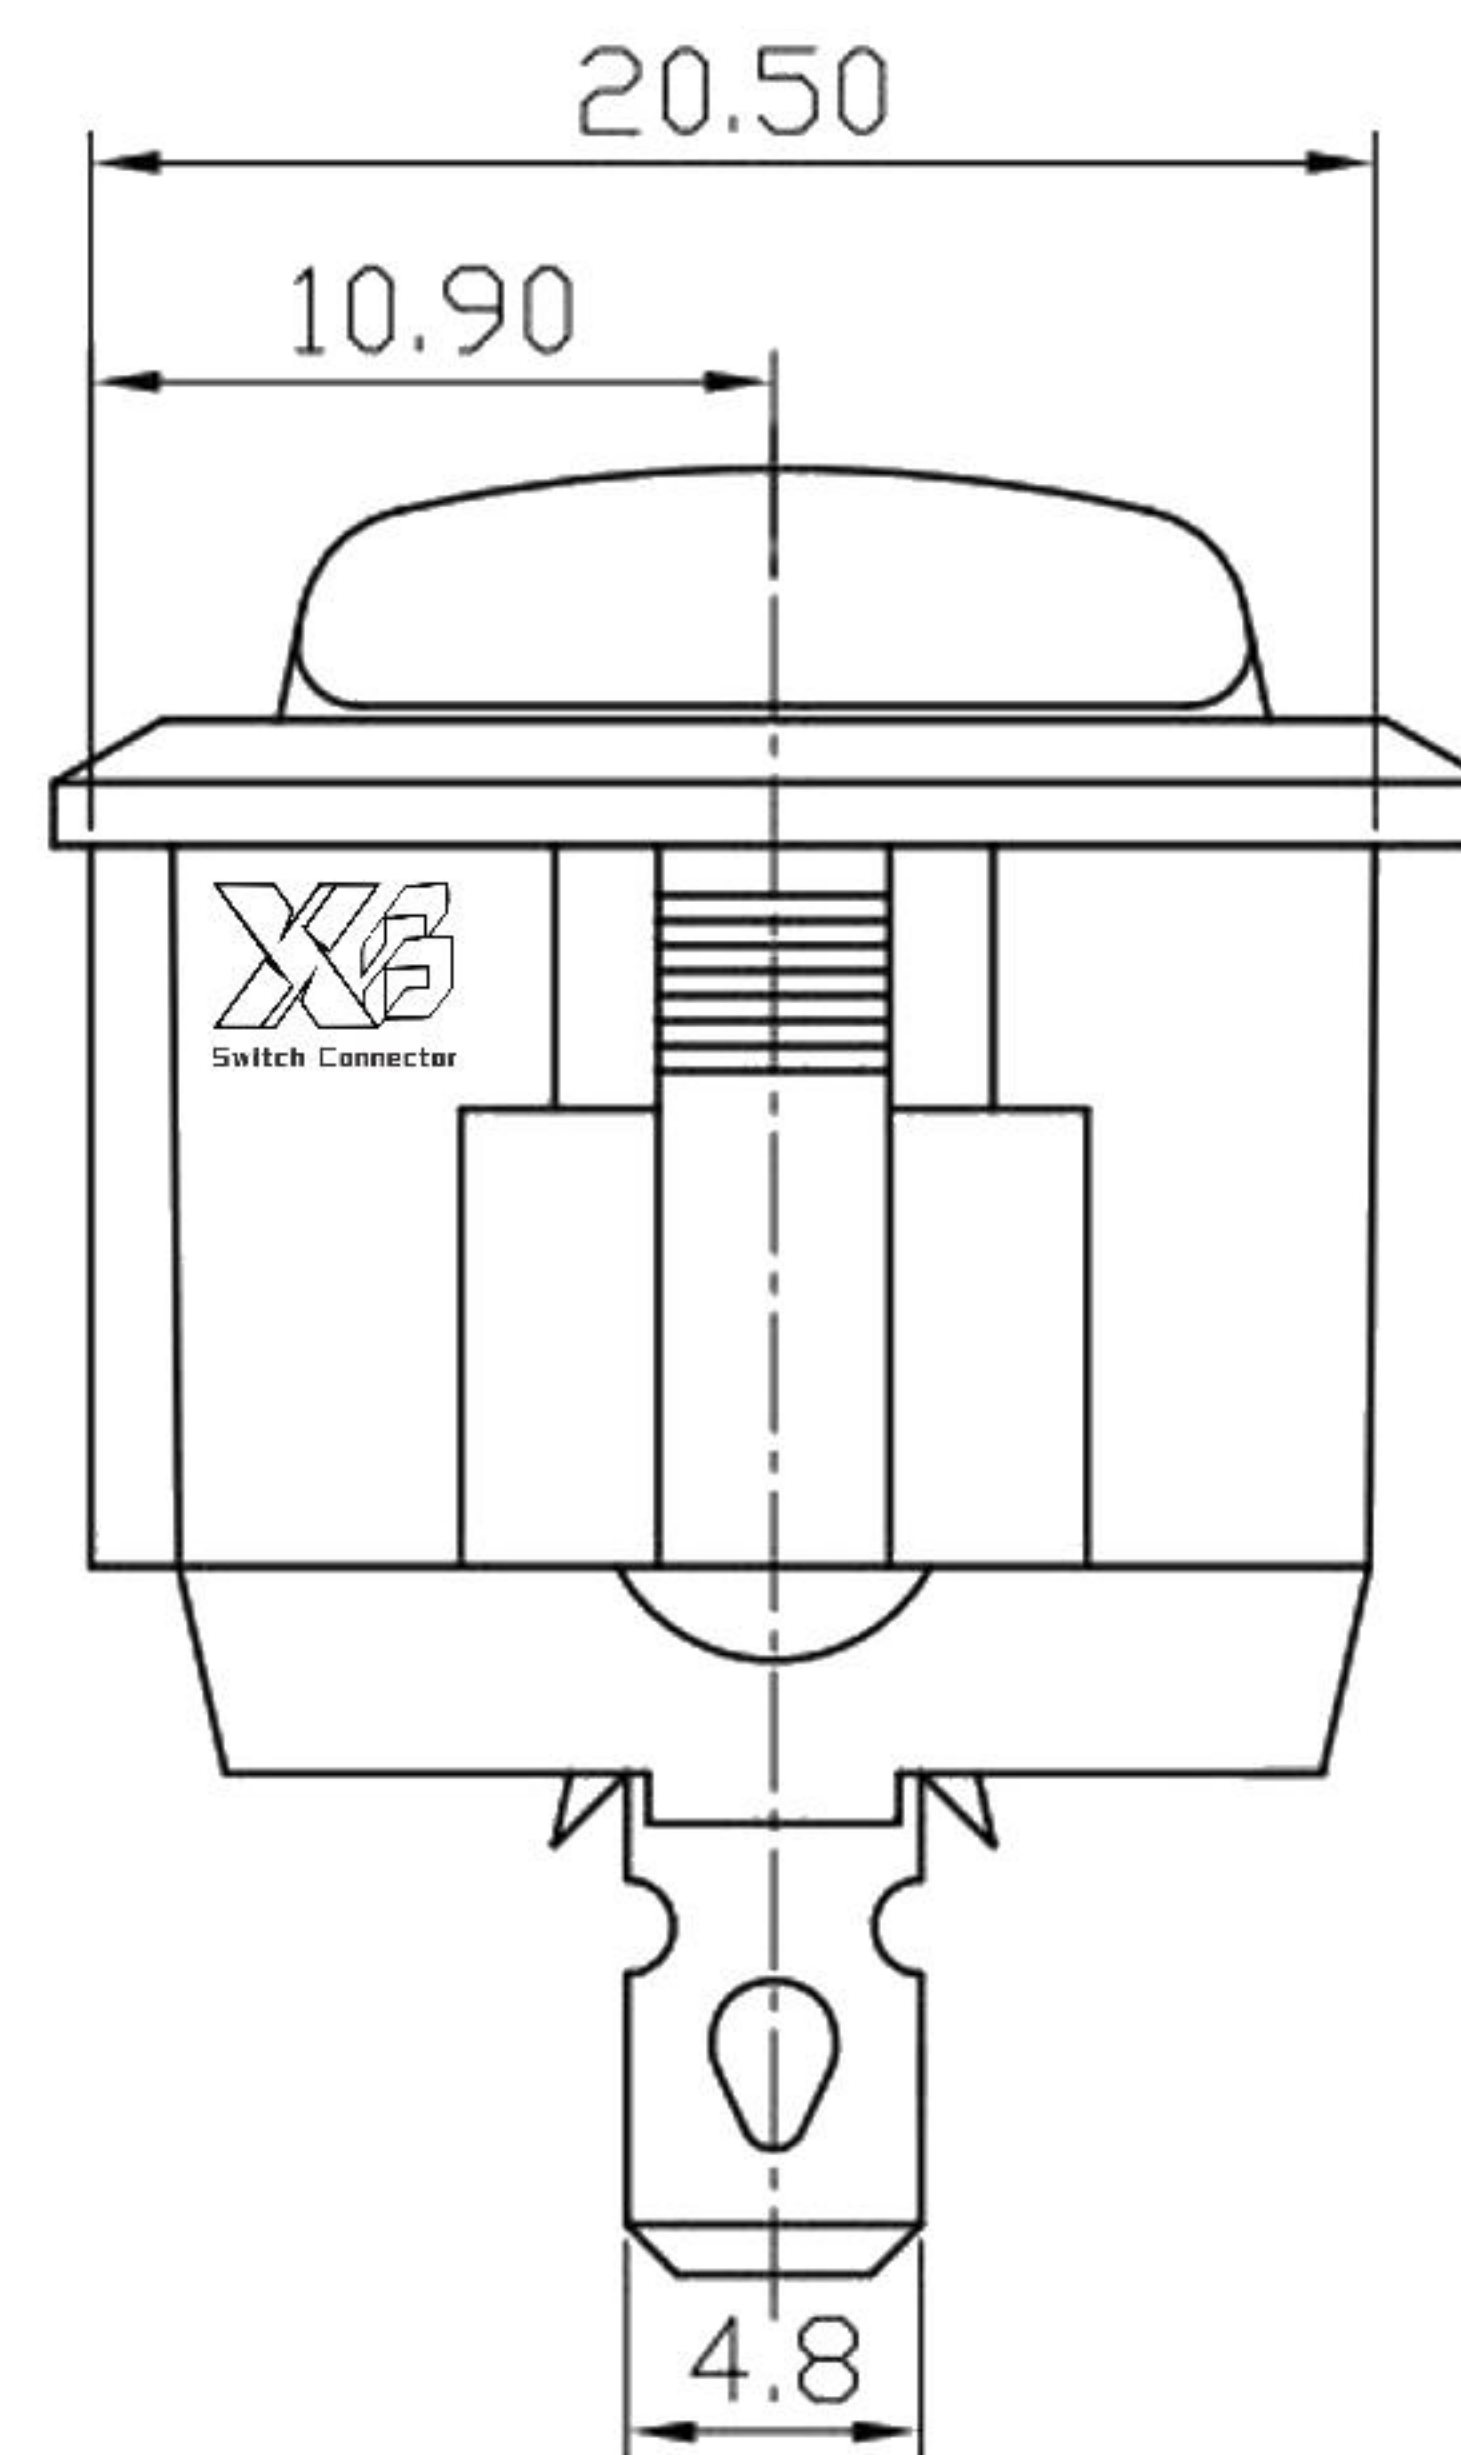


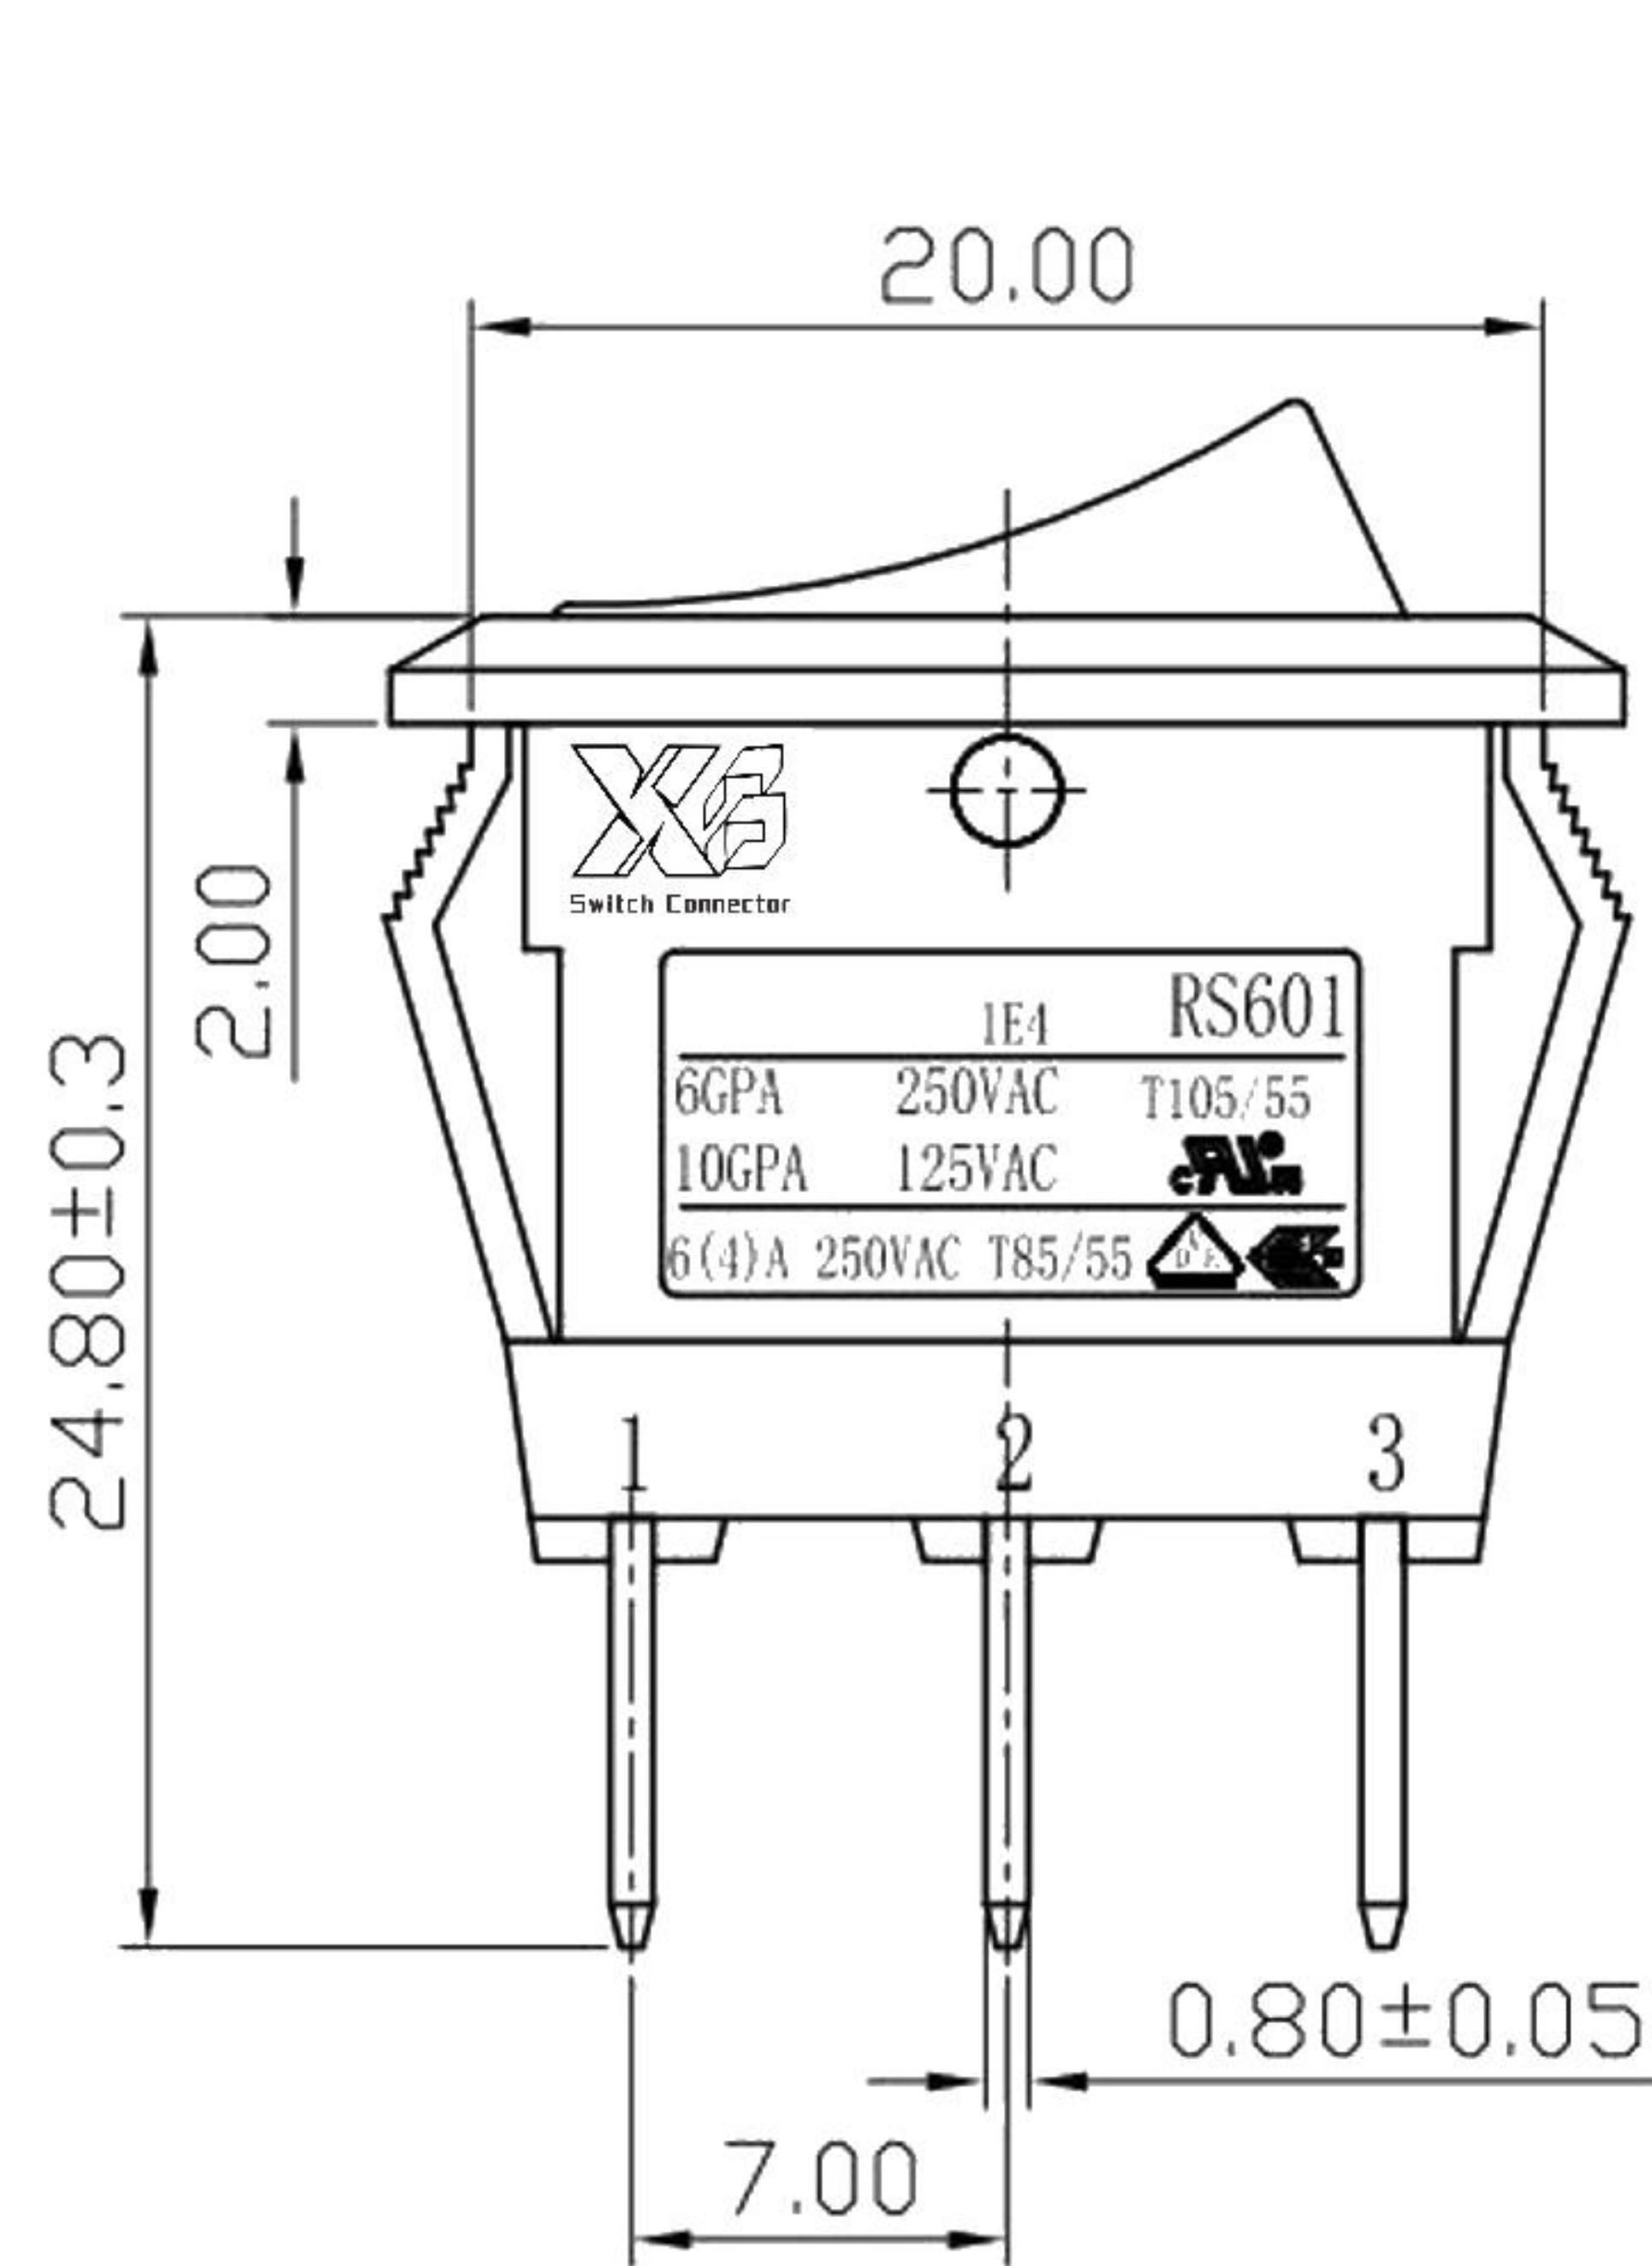

PANEL CUT-OUT		
Z	X	Y
0.80~1.50	19.90~20.10	19.3~19.5

NOTES:

1. Rating:

CQC 6A 250VAC

6(8)A 250VAC

8A/128A 250VAC T105/55

UL CUL 10GPA 125VAC

6GPA 250VAC T105/55

VDE ENEC 6(4)A 250VAC T85/55

KC 6(4)A 250VAC T85/55

2. Circuit Diagram: 3P ON-ON

3. Terminal Strength: ≥80N

4. Electrical life: ≥10000 cycles



5. Withstand Voltage: Withstand Voltage: 1500VAC 1min Terminals to Button: 3000VAC 1min

6. Leakage Current: 1mA

7. Current resistance: ≤50mΩ (initial)

8. Insulation resistance: ≥100MΩ

9. Body Material: NYLON 66 94V-2~0

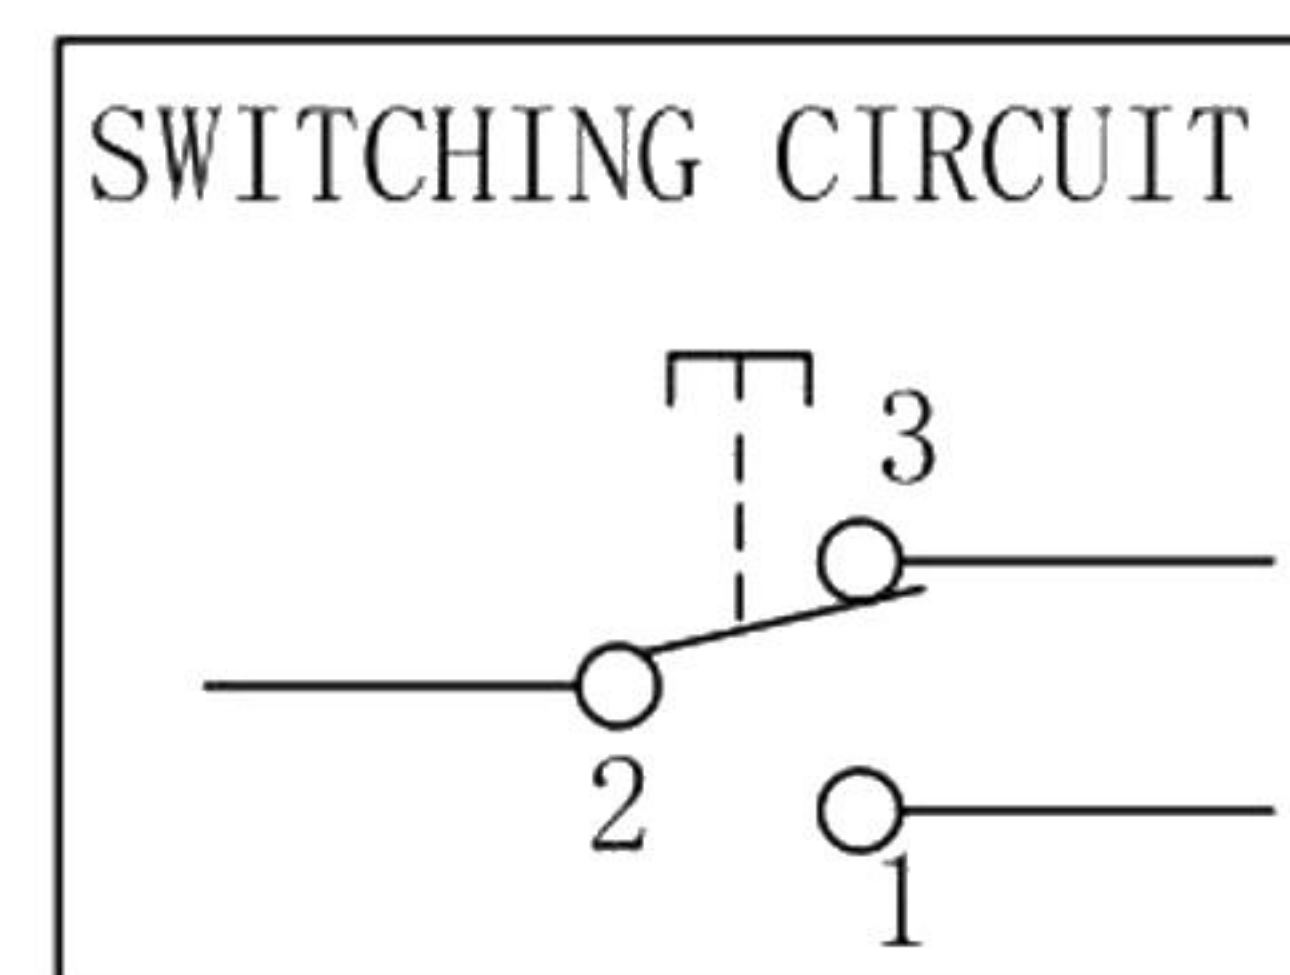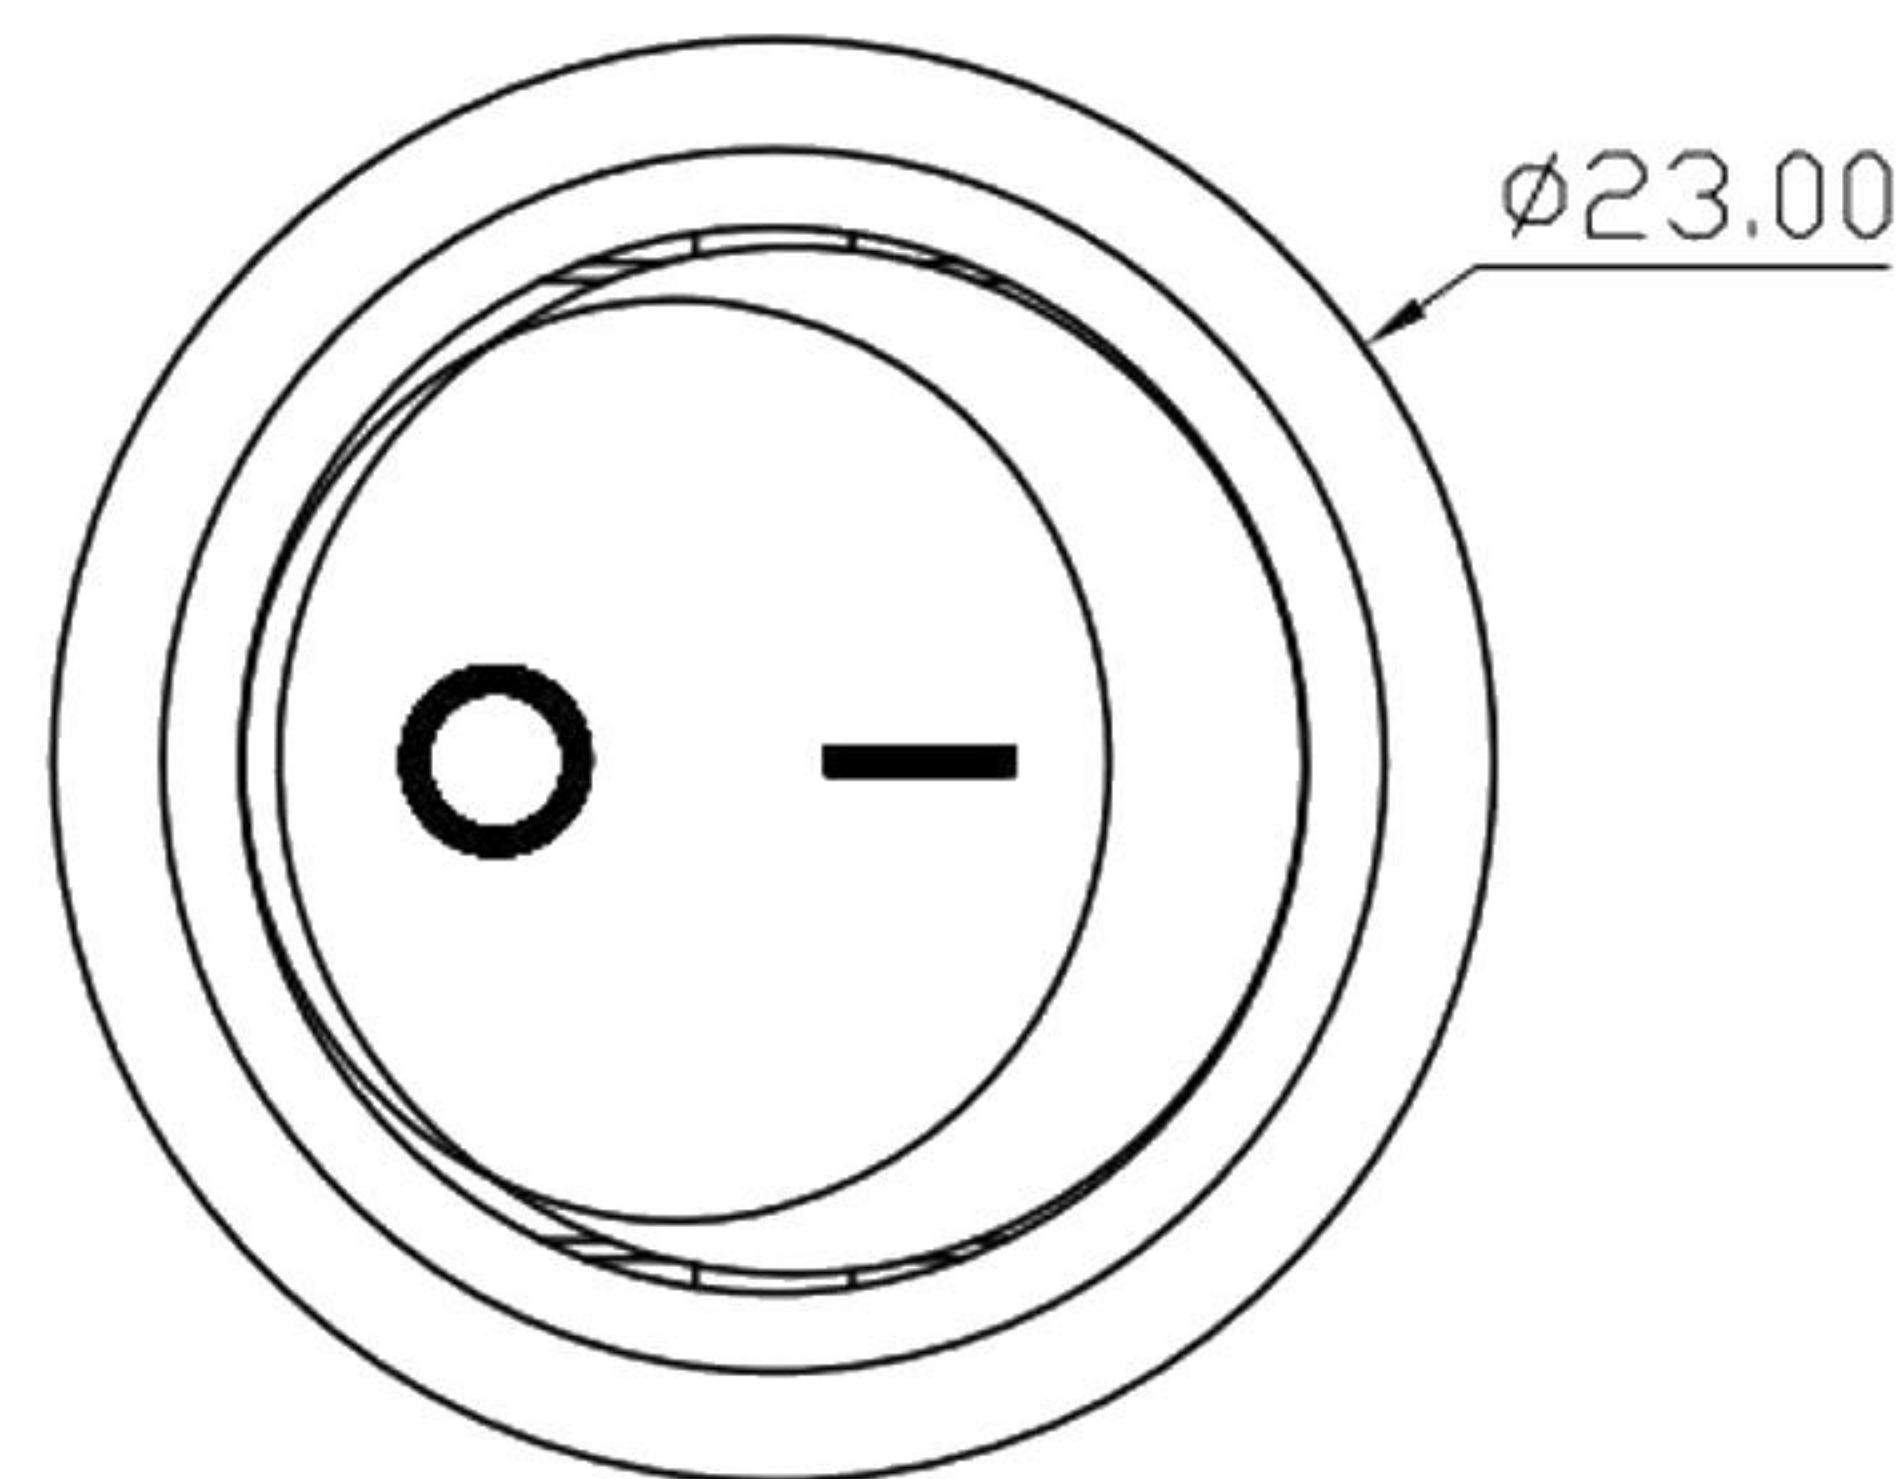

47*34*25cm箱, 100只*30袋装=3K件, 净重: 16.2 KG, 毛重: 18.8=KG,

7	基座	1	环保阻燃PA66		
6	弯端	2	0.8mm黄铜带 +复合银触点	镀锡	
5	中端	1	0.8mm黄铜带	镀锡	
4	接触桥	1	0.6mm黄铜带 +复合银触点	镀银	
3	套管	1	0.3mm拉伸钢	镀镍	
2	弹簧	1	Ø0.40弹簧钢丝	发黑	
1	按钮	1	环保阻燃PC		
序号	名称	数量	材料	处理	备注

普通公差:

COMMON TOLERANCE :

UP TO 5	±0.20
ABOVE 5 TO 30	±0.30
ABOVE 30	±0.50
ANGULAR	±5°

单位
UNIT

mm

投影
PROJECTED

品名
PRODUCT NAME

型号
MODEL NO.

图号
DWG NO.

比例
SCALE

Free

绘图
DRAWN BY

日期
DATE

核对应
CHECKED BY

核准
APPROVAL BY

吴飞

周培雷

RS601C-1020011BB-ZP

/RS601

2021.11.08

核对应

周培雷

图号

RS601C-1020011BB-ZP

/RS601



东莞市溪榜电子有限公司

DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV.	DATE	REVISION DESCRIPTION	ISSUE	普通公差:	COMMON TOLERANCE :	单位	mm	投影	品名	型号	图号	比例	Free
A4				普通公差:	COMMON TOLERANCE :	单位	mm	投影	品名	型号	图号	比例	Free
A3				普通公差:	COMMON TOLERANCE :	单位	mm	投影	品名	型号	图号	比例	Free
A2				普通公差:	COMMON TOLERANCE :	单位	mm	投影	品名	型号	图号	比例	Free
A1				普通公差:	COMMON TOLERANCE :	单位	mm	投影	品名	型号	图号	比例	Free
REV.	DATE	REVISION DESCRIPTION	ISSUE	普通公差:	COMMON TOLERANCE :	单位	mm	投影	品名	型号	图号	比例	Free