

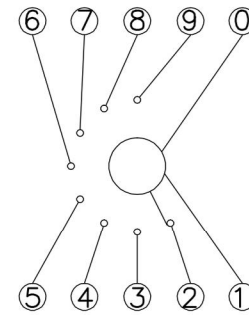
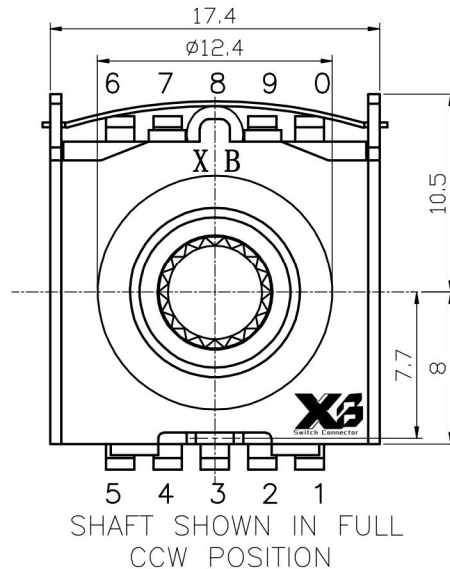
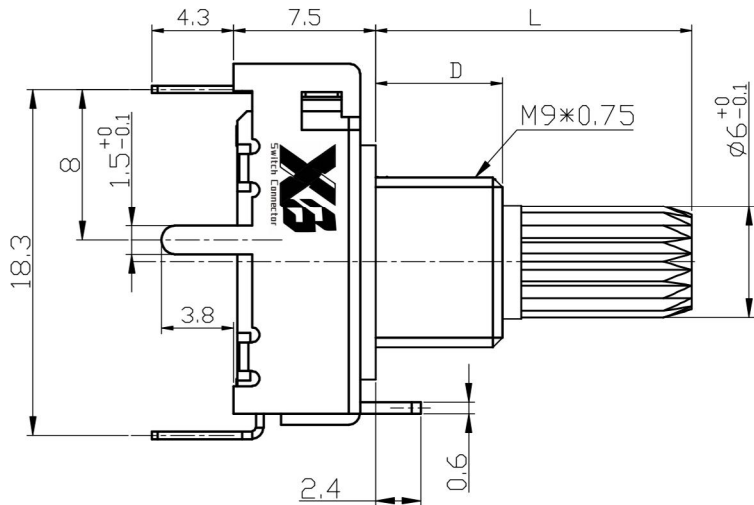


ROHS

DIMENSIONS

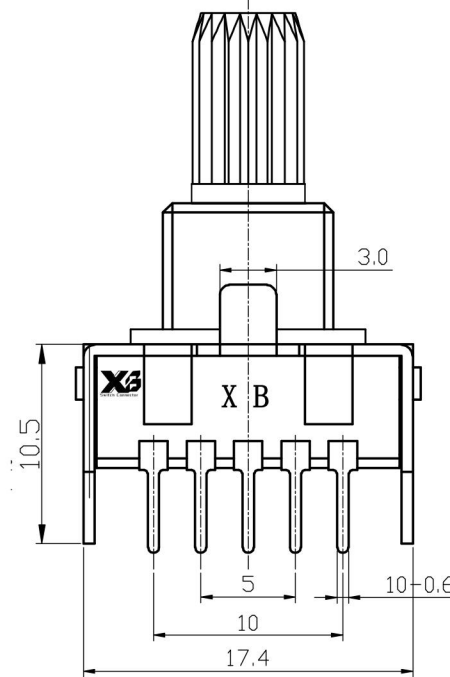

CIRCUIT EXPLANATION

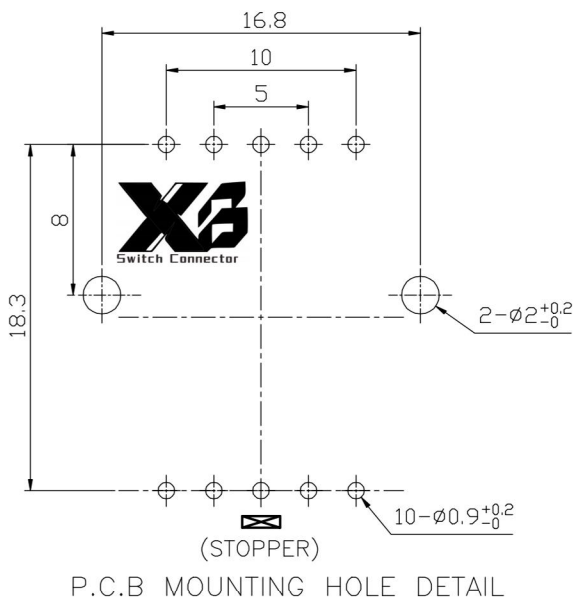

D	5			7		
L	15	20	25	15	20	25
F	7	12	12	7	12	12



SPECIFICATION (INITIAL)	
RATING: DC 5V 0.5mA 10mA	
ANGLE: FULL ROTATION ANGLE: 360 DEGREES	
CONTACT RESIS TANCE: 100mΩ max	
INSULATION RESISTANCE: 100MΩ DC 250V 1mA	
WITHSTAND VOLTAGE: 300V AC/min or	
OPERATION FORCE: 6 ± 3N 600gf ± 300gf	
SWITCHING LIFE: 20,000 cycles	

XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle ± 0.3

3RD. ANGEL'S



UNITS

MM

DRAWN BY: GAO PENG
CHECKED BY: PANG DONG
APPROVED BY: HE. LONG. FEI

DATE: 07/23/13
DATE: 07/23/13
DATE: 07/23/13

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1

TITLE
MODLE
DWG NO.
PART NO.

ENCODER
ENCODER W/I SWITCH
XB-RS-1701-E1-K
直插脚带卡点

SIZE: A4
VER: R2

ITEM NO.	DESCRIPTION	DRAWN	DATE
2	公差及料號更新	Jack	072313
1	圖面更新	Frank Wu	021012