
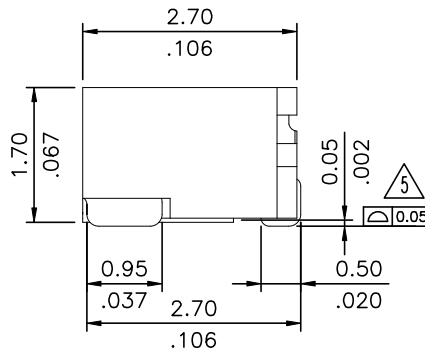
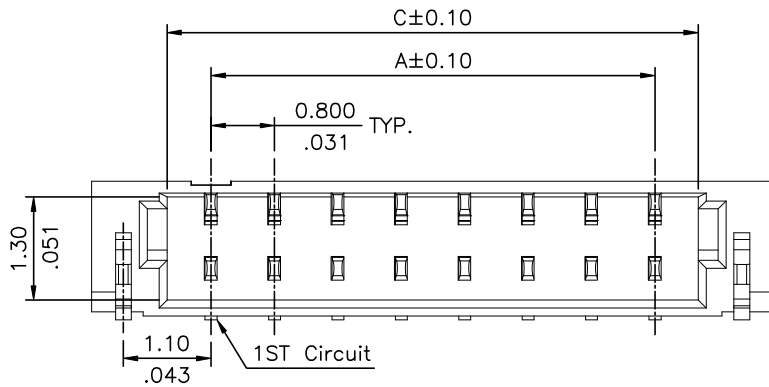



NOTE:

Material :

- △ \* Base : High Temperature plastic UL 94V-0, Color Nature
- \* Contact : Copper alloy
- \* Fixed tab : Copper alloy with Tin or Gold Plated
- \* For Lead-Free IR Reflow process

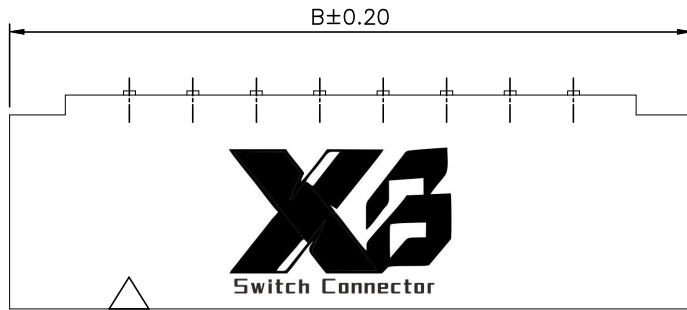


DIM. A = 0.80 x NO. OF SPACES  
 DIM. B = DIM. A + 3.0  
 DIM. C = DIM. A + 1.1  
 \* AVAILABLE IN 2 THROUGH 22


ORDERING CODE


CI18 \*\* M \* H R 0 -NH  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No.
- ② Contact: 02 to 22
- ③ M= SMT TYPE HEADER
- ④ Plating :  
 1= Tin plated over Nickel  
 2= Gold flash over (50μ") Nickel
- ⑤ Type : H= Side entry
- ⑥ Packing option:  
 R= Tape & Reel Packing
- ⑦ Other option:  
 0= Standard
- ⑧ -NH= For Lead Free IR Processes and Halogen-Free

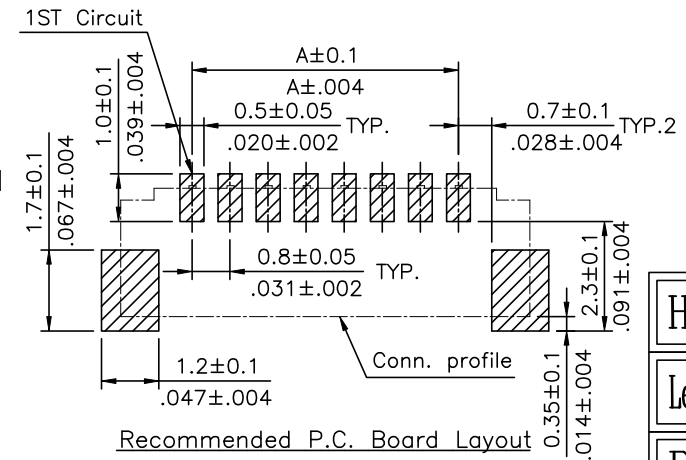

Halogen-Free  
 Lead Free Process  
 RoHS Compliant



△5	Jack	1/2-24'	ECNT123179/ECRB123029		DATE	UNIT: mm / inch	TITLE: 0.8mm Pitch WTB SMT R/A TYPE	 <b>东莞市溪榜电子有限公司</b> DONG GUAN XI BANG ELECTRONI CS CO., LTD.	
△4	Sandy	6/6-16'	ECNT116118	DRAWN BY: Jack	1/2-24'	TOLERANCE UNLESS OTHERWISE SPECIFIED	MATERIAL:		
△3	Ellie	12/24-14'	ECNT114252/ECRT114090	ENGINEER: Sun	1/2-24'	.X ± 0.30/.012 X' ± 1'	FINISH:	DRAWING NO. CI1801SF	PART NO. CI18**M*H*0-NH
△2	Sun	9/17-14'	ECRH114019/ECNT114194	CHECKED BY: Eisley	1/2-24'	.XX ± 0.20/.008 X' ±		SCALE 10 / 1	SHEET 1 OF 2
SYM	NAME	DATE	REVISIONS	APPROVED BY: Eisley	1/2-24'	.XXX ± 0.10/.004 XX' ±			

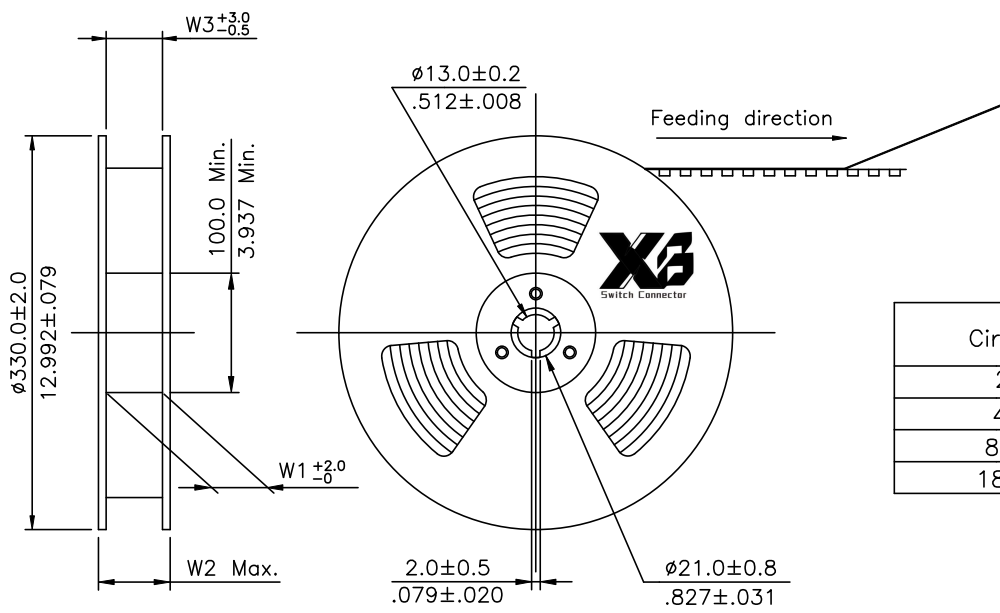


NOTES:

1. Reel Material : HIPS
2. 10 sprocket hole pitch cumulative tolerance  $\pm 0.20$
3. Carrier camber is within 1 mm in 250 mm.
4. Material : Transparent ps.
5. All dimensions meet EIA-481 requirements.
6. Thickness :  $0.35 \pm 0.05$ mm.
7. Quantity : 3500 pcs.

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
2~3	12.0(.470)	—	12.5(.491)	19.5(.768)	12.5(.491)	14
4~7	16.0(.630)	—	16.5(.650)	22.5(.885)	16.5(.650)	11
8~17	24.0(.945)	—	24.5(.965)	30.5(1.200)	24.5(.965)	9
18~22	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7

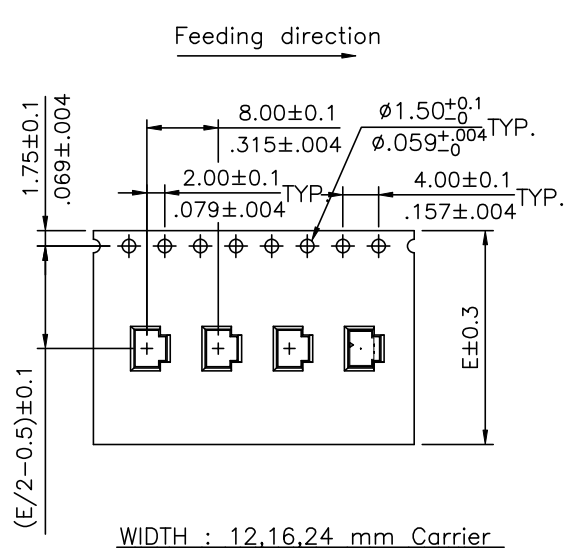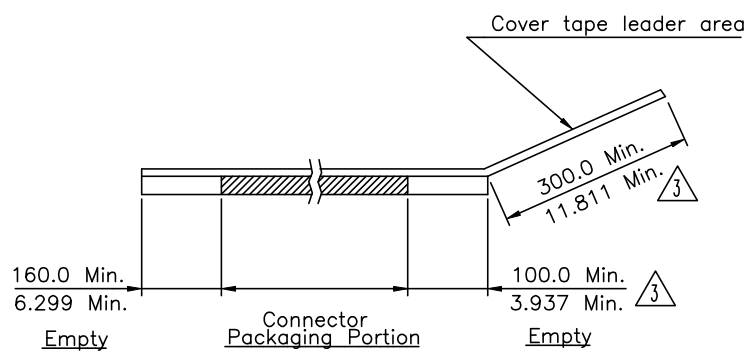

WIDTH : 12,16,24 mm Carrier

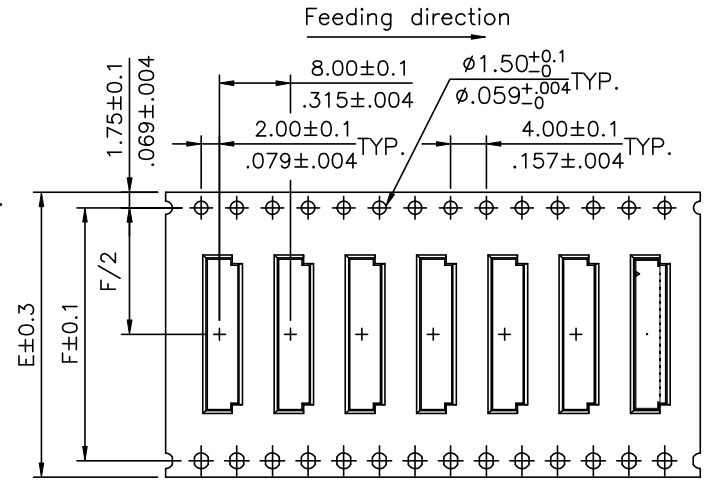

WIDTH : 32 mm Carrier

RoHS Compliant

SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	1/2-24'	UNIT: mm / inch	TITLE: 0.8mm Pitch WTB SMT R/A TYPE	MATERIAL:	FINISH:	DRAWING NO. CI1801SF	PART NO. CI18**M*H*0-NH	SCALE	SHEET 2 OF 2
5	Jack	1/2-24'	ECNT123179/ECRB123029	DATE	UNIT: mm / inch	TITLE: 0.8mm Pitch WTB SMT R/A TYPE								
4	Sandy	6/6-16'	ECNT116118	DRAWN BY:	Jack	1/2-24'	TOLERANCE UNLESS OTHERWISE SPECIFIED							
3	Ellie	12/24-14'	ECNT114252/ECRT114090	ENGINEER:	Sun	1/2-24'	.X ±	.X' ± 1'						
2	Sun	9/17-14'	ECRH114019/ECNT114194	CHECKED BY:	Eisley	1/2-24'	.XX ±	.X' ±						
				APPROVED BY:	Eisley	1/2-24'	.XXX ±	.XX' ±						

**东莞市溪榜电子有限公司**  
DONG GUAN XI BANG ELECTRONICS CO., LTD.