

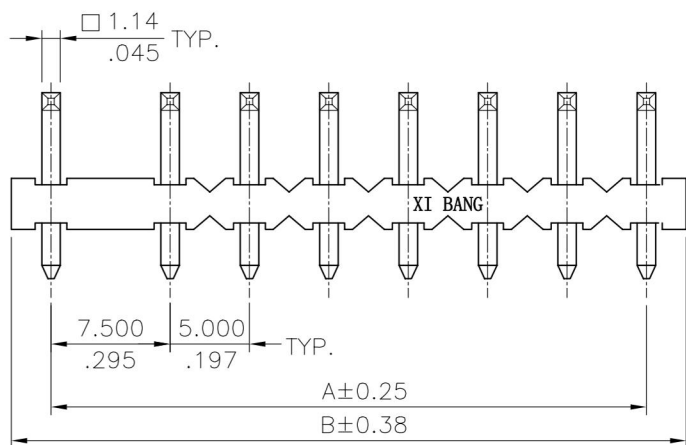
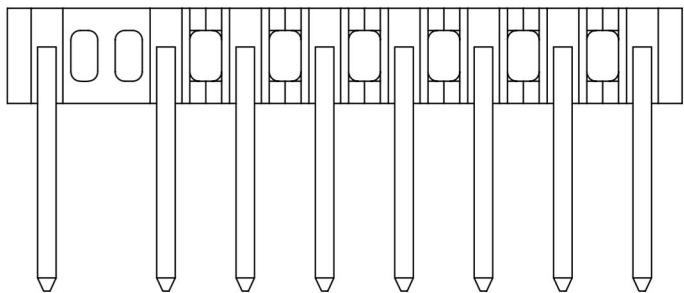


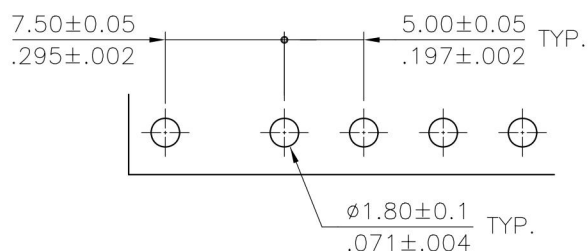

$A = 5.00 \times \text{No. of Spaces} + 2.50$

$B = A + 5.00$

* Available in 2 through 20 circuits

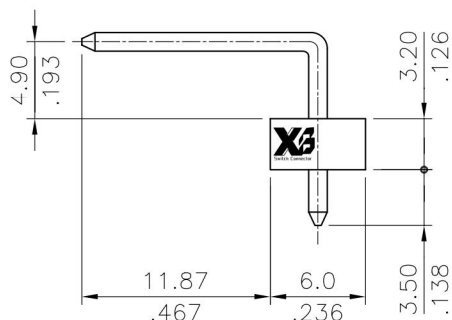

Material:

* Insulation: Glass filled polyester UL 94V-0

* Contact: Brass

Ordering Code:

CI79 ** P 1 H *0
① ② ③ ④ ⑤ ⑥

① Series No.

CI79= 7.5-5.0mm center spacing

② No. of Circuits

③ Contact type: P= Pin header

④ Plating option:

1= $3.05\mu\text{m}(120\mu\text{'})$ Min. Tin
over $0.76\mu\text{m}(30\mu\text{'})$ Nickel

2= Gold flash plated over
 $1.27\mu\text{m}(50\mu\text{'})$ Nickel

3= $0.38\mu\text{m}(15\mu\text{'})$ Gold plated
over $1.27\mu\text{m}(50\mu\text{'})$ Nickel

4= $0.76\mu\text{m}(30\mu\text{'})$ Gold plated
over $1.27\mu\text{m}(50\mu\text{'})$ Nickel

⑤ Tail Style: H= Right angle

⑥ Option: 00= Color White(Nature)
10= Color Black

Recommended P.C. Board Layout

Tin-Lead Process

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 7.50-5.00MM(.295"-.197") BOARD MOUNT PIN HEADER
③				DRAWN BY: Sun	08/10-04'	TOLERANCE UNLESS OTHERWISE SPECIFIED	
②				ENGINEER: Eisley	08/10-04'	.X $\pm 0.38/.015$ X' $\pm 1'$	MATERIAL:
①	SUN	8/10/04'	ECN04305	CHECKED BY: David	08/10-04'	.XX $\pm 0.25/.010$ X' $\pm$	FINISH:
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	08/10-04'	.XXX $\pm 0.15/.006$.XX' $\pm$	
 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.							
DRAWING NO.		CI7902SD		PART NO.		CI79**P1H*0	
SCALE		2 / 1		SHEET		1 OF 1	