


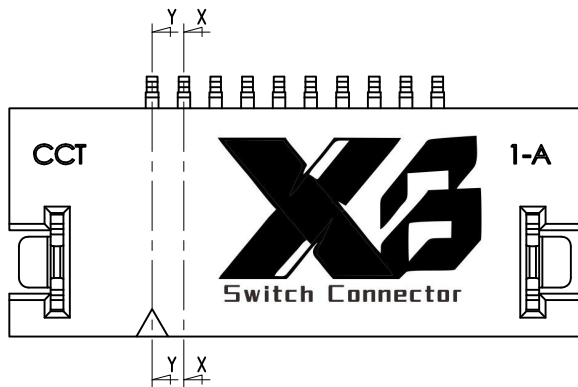




Material :

* Body : LCP With 30% G.F UL 94V-0


Color Nature

* Contact : Copper alloy

* Fixed tab : Copper alloy With Matte Tin plated

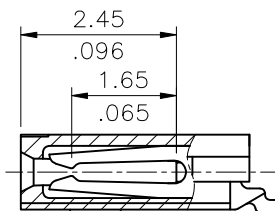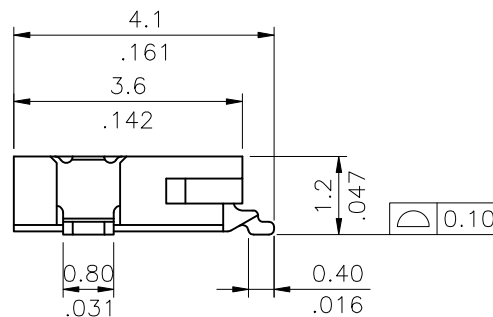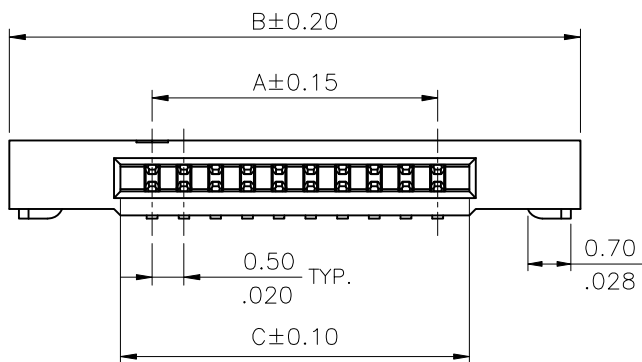

SEC.: Y-Y



SEC.: X-X

Ordering Code

CF27 ** 1 H 0 * A -NH
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series No.

② No. of Circuits

③ Plating code:

1= 3.05μm(120μ") Min. Matte Tin
over 0.76μm(30μ") Nickel

2= Gold flash plated over 50μ"min. Nickel

④ Contact style: H= Side Entry

⑤ Color: 0= Nature

⑥ Packing option: R= Tape & Reel
T= Tube Packing

⑦ Option: A= Base of Wide Size

⑧ Process:

-NH= For Lead Free soldering process
and Halogen-Free

Dim.A = 0.50 x No. of Spaces

Dim.B = DIM.A + 4.5

Dim.C = DIM.A + 1.0



Available in 4 ~ 20 Circuits

Halogen-Free


Lead Free Process

RoHS Compliant

④						DATE	UNIT: mm / inch		TITLE: 0.50mm(.031") LIF FFC/FPC CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONI CS CO., LTD.	
③	Ken	11/27-18	ECNT118278/ECRH118041	DRAWN BY:	Ken	11/27-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
②	Karen	7/20-18'	ECNT118162/ECRT118038	ENGINEER:	Sun	11/28-18'	.X ± 0.15/.006	X' ± 1'	MATERIAL:		
①	Enya	1/6-14'	ECNT114004	CHECKED BY:	Eisley	11/28-18'			.XX ± 0.10/.004		.X' ±
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	11/28-18'	.XXX ± 0.05/.002	.XX' ±		DRAWING NO. CF2702SD	PART NO. CF27**1H0*A-NH
										SCALE 8 / 1	SHEET 1 OF 3

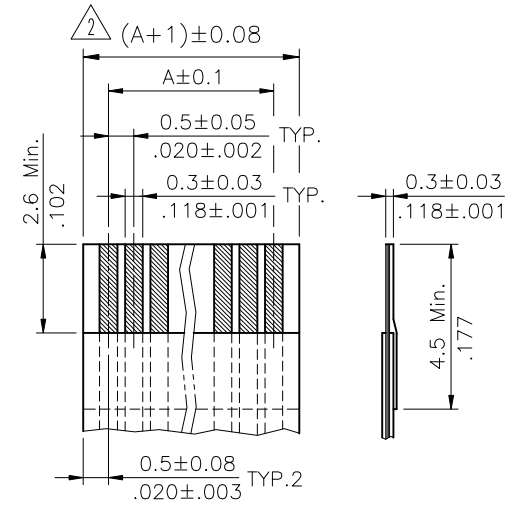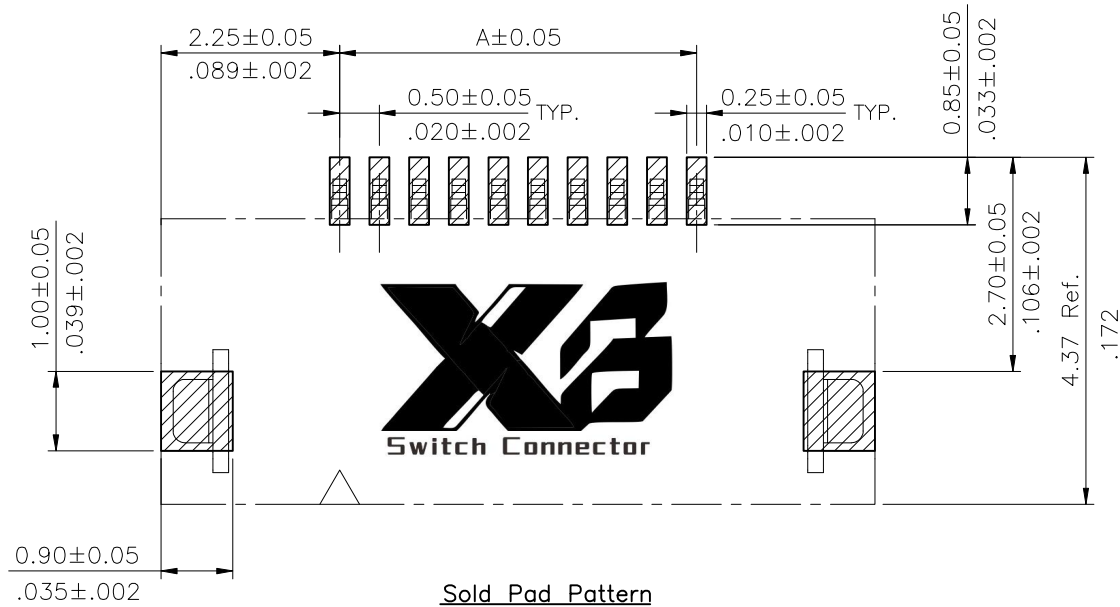

Accommodated FFC

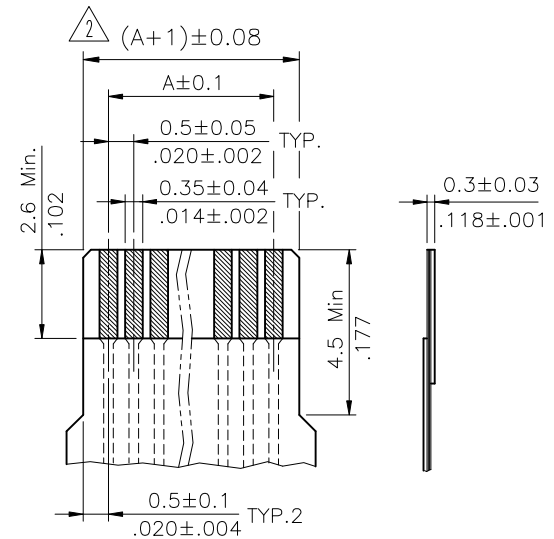


Accommodated FPC

RoHS Compliant



4						DATE	UNIT: mm / inch		TITLE: 0.50mm(.031") LIF FFC/FPC CONNECTOR	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.				
3	Ken	11/27-18	ECNT118278/ECRH118041	DRAWN BY:	Ken	11/27-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED				MATERIAL:	DRAWING NO.	CF2702SD	PART NO.
2	Karen	7/20-18'	ECNT118162/ECRT118038	ENGINEER:	Sun	11/28-18'	.X ± 0.15/.006	X' ± 1'	FINISH:					
1	Enya	1/6-14'	ECNT114004	CHECKED BY:	Eisley	11/28-18'	.XX ± 0.10/.004	.X' ±						
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	11/28-18'	.XXX ± 0.05/.002	.XX' ±		SCALE	8 / 1	SHEET	2 OF 3	

NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Clear, Conductive Polystyrene Alloy
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * All dimensions meet EIA-481-2 & EIA-481-3 requirements
- * Quantity : 3300 PCS/Reel

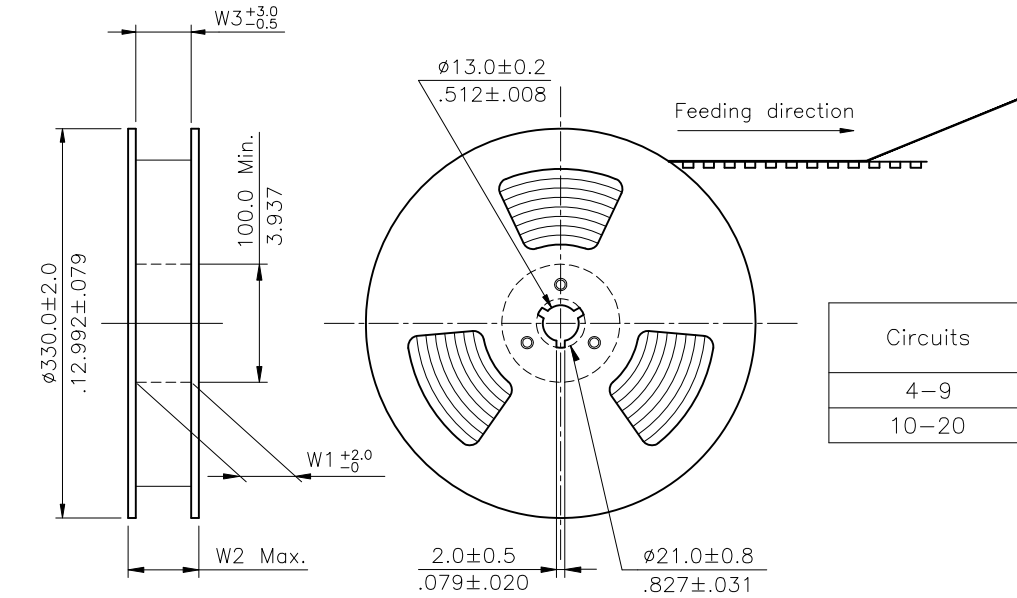

Circuits	Dimension					Packing (Reel/Carton)
	E	F	W1	W2	W3	
4-9	16.0(.630)	-	16.5(.650)	22.5(.886)	16.5(.650)	11
10-20	24.0(.945)	-	24.5(.965)	30.5(1.201)	24.5(.965)	9

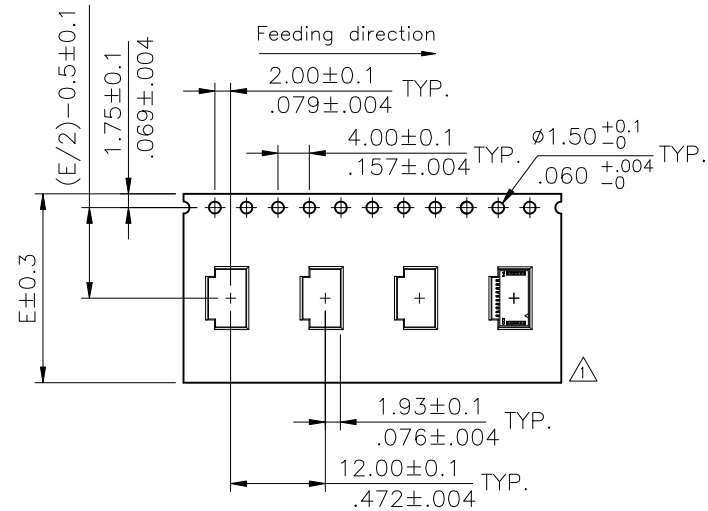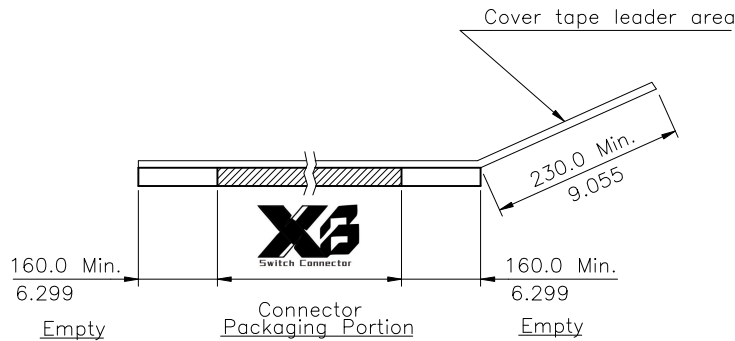

WIDTH : 16.24 mm Carrier

RoHS Compliant

4						DATE	UNIT: mm / inch		TITLE: 0.50mm(.031") LIF FFC/FPC CONNECTOR	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
3	Ken	11/27-18	ECNT118278/ECRH118041	DRAWN BY:	Ken	11/27-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
2	Karen	7/20-18'	ECNT118162/ECRT118038	ENGINEER:	Sun	11/28-18'	X ±	X' ± 1'	MATERIAL:			
1	Enya	1/6-14'	ECNT114004	CHECKED BY:	Eisley	11/28-18'	.XX ±	.X' ±	FINISH:			
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	11/28-18'	.XXX ±	.XX' ±		DRAWING NO. CF2702SD	PART NO. CF27**1H0*A-NH	
										SCALE		SHEET 3 OF 3