


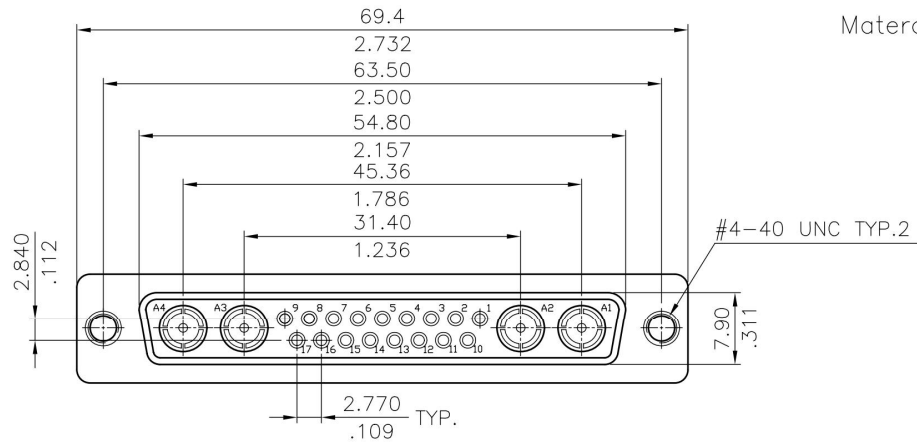

Material:

Insulator: Glass filled Polyester UL 94V-0

Contact: Copper alloy



Shell: Steel, Tin plated as standard

Coaxial terminal

Insulator: Teflon UL 94V-0

Color white

Contact: Brass

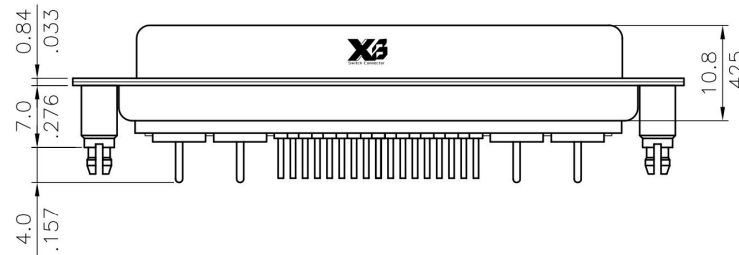


RoHS Compliant

4						DATE	UNIT: mm / inch		TITLE: 21W4 COAXIAL FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.	
3					DRAWN BY: Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED				
2					ENGINEER: David	10/19-01'	.X ± 0.30/.012	X" ± 1"	MATERIAL:		
1					CHECKED BY: David	10/19-01'	.XX ± 0.20/.008	X" ±			
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	10/19-01'	.XXX ± 0.10/.004	.XX" ±	FINISH:	DRAWING NO. 21W404SB	PART NO. 21W4SCV*****00
										SCALE 2 / 1	SHEET 1 OF 2

Ordering Code





$\frac{21W4}{①}$
 $\frac{S}{②}$
 $\frac{C}{③}$
 $\frac{V}{④}$
 $\frac{3}{⑤}$
 $\frac{2}{⑥}$
 $\frac{1}{⑦}$
 $\frac{75}{⑧}$
 $\frac{D00}{⑨}$

- ① Series No.
 ② Connector Type: S= Receptacle
 ③ Contact type: C= Coaxial Contact
 ④ Contact tail style: V= Straight Dip type
 ⑤ Coaxial contact plating:
 2= Gold flash plated over Nickel
 3= 15 μ " Gold plated over Nickel
 4= 30 μ " Gold plated over Nickel
 5= 50 μ " Gold plated over Nickel
 ⑥ Signal contact plating:
 2= Gold flash plated over Nickel
 3= 15 μ " Gold plated over Nickel
 4= 30 μ " Gold plated over Nickel
 ⑦ Insulator color: 1= Black, 6= Green
 ⑧ Performance: 50= 50 Ω , 75= 75 Ω
 ⑨ Mounting Style:
 000= With $\phi 3.05$ mm holes on shell
 B00= Riveted #4-40 UNC open nuts on front shell
 C00= Riveted #4-40 UNC open nuts on rear shell
 D00= Riveted #4-40 UNC ground stand-off
 on rear shell(standard)

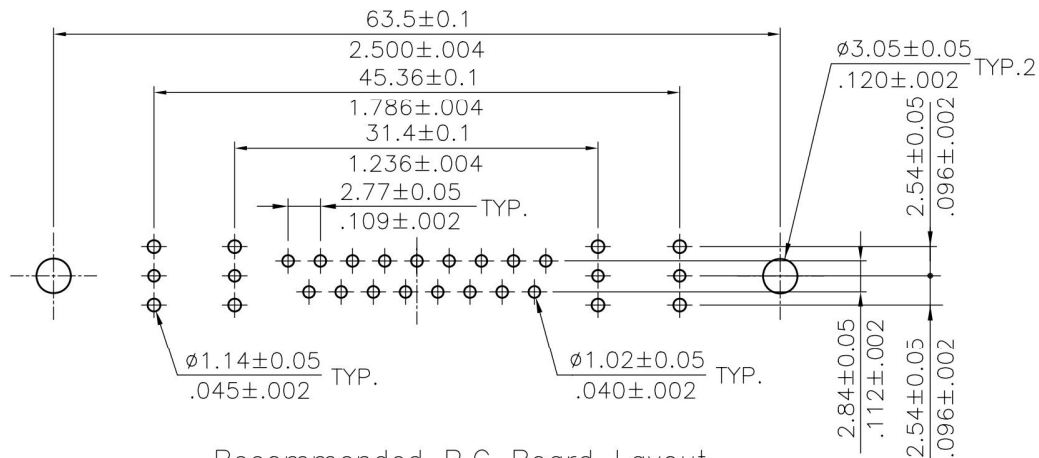

Mounting Style

RoHS Compliant

Code	000	Code	B00	Code	C00	Code	D00
		DIM. L= 4.0mm 		DIM. L= 4.0mm 		DIM. L= 7.0mm 	

4					DATE	UNIT: mm / inch	TITLE: 21W4 COAXIAL FEMALE D-SUB CONNECTOR (TOP ENTRY BOARD MOUNT TYPE)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.
3				DRAWN BY: Rita	10/18-01'	TOLERANCE UNLESS OTHERWISE SPECIFIED .X ± 0.30/.012 .X' ± 1" .XX ± 0.20/.008 .X" ± .XXX ± 0.10/.004 .XX' ±	MATERIAL:	
2				ENGINEER: David	10/19-01'		FINISH:	
1				CHECKED BY: David	10/19-01'			
SYM	NAME	DATE	REVISIONS	APPROVED BY: Alex	10/19-01'			DRAWING NO. 21W404SB PART NO. 21W4SCV*****00 SCALE 2 / 1 SHEET 2 OF 2