


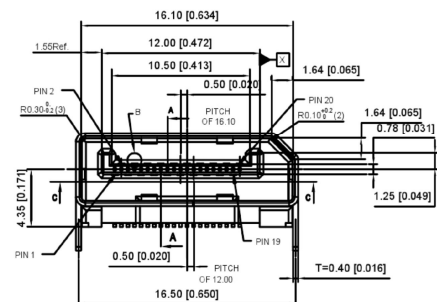



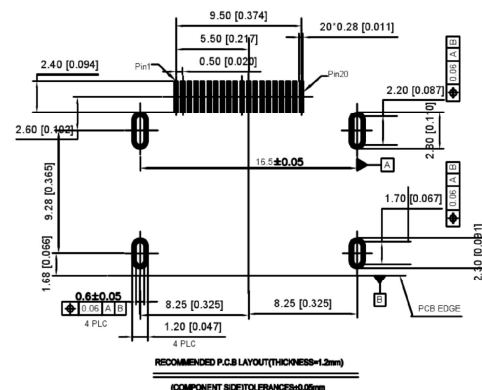




F: Flat




SECTION A-A



DETAIL B

SCALE: 8:1



S: Scrolls

- NOTES:
- MATERIAL:
HOUSING: THERMOPLASTIC HIGH TEMP WITH 30% GF
(PA10T RE30NH / LCP E130, E4711 OR 6807LHF) UL94V0
CONTACT: C2680R-EH T=0.20mm
SHELL: C2680R-H T=0.40mm
MYLAR: KAPTON TAPE T=0.06mm
 - PLATING:
CONTACT: 10u" MIN. GOLD PLATING ON CONTACT AREA.
GOLD FLASH PLATING OVER ALL
SHELL: 50-90u" NICKEL PLATING OVERALL
 - SOLDER TAIL COPLANARITY 0.10MAX.
 - PART NO. DESCRIPTION:
CAR02-20 1 E N X X
○ DISPLAY PORT
○ POS NO.:
20/20 POS.
○ HOUSING COLOR
1-BLACK
○ CONTACT PLATING
E: Au30u" + MATTE TIN
○ SHELL PLATING:
N-NICKEL PLATING
○ PACKAGE
2-TAPE REEL
5-TAPE REEL + MYLAR
○ Interface type
S: Scrolls
F: Flat

DSND		SCALE: N/A	MODEL TYPE: DP CONNECTOR
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	CAR02-201ENXX
REVISIONS			WEIGHT
www.alpsr.com www.gdxjdz.com www.xbswitch.com			SHEET
UNSPECIFIED TOLERANCES			REVISION
ANGULAR			1/1
L ≤ 4			A0
L ≤ 16			
16 < L ≤ 63			
L > 63			
±5°			
±0.2			
±0.3			
±0.4			
±0.5			



DONG GUAN XI BANG ELECTRONIC CO., LTD